

# QUASAR 30 CEILING



Ceiling mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- 90° x 95° beam angle (TECH)
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- IDA DARK SKY Approved - 3000K and below



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

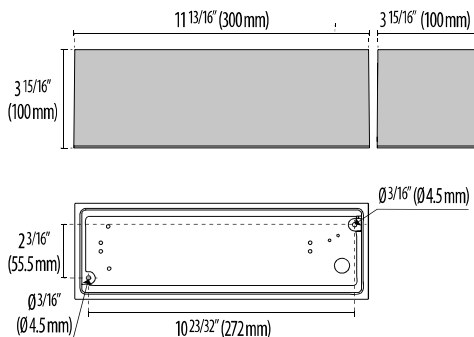

Scan here  
for installation  
instructions



## QUASAR 30 CEILING

Lumen Output	27K	3K	35K	4K	5K
Quasar 30 Ceiling	1689	1756	1822	1889	1955

21W Max Wattage

Revision 06  
05/24

# Order Guide - Quasar 30 Ceiling



Order code example

**Q30C-21-AM-27K-NA**

Q30C-

Wattage	Finish	Kelvin	Voltage	Controls	Accessories
<b>21W</b> 21 watt (max)  <b>XX</b> Specify Wattage Must be below max	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>REM</b> Remote Mounted Emergency Battery Back-Up  <b>CON2</b> (single-gang j-box, adaptor plate and 1/2" knockouts)  <b>CON4</b> (single-gang j-box, adaptor plate and 3/4" knockouts)
	<b>IG</b> Iron Gray	<b>3K</b> 3000k		<b>0-10V</b> 0-10V Dimming	
	<b>IR</b> Iron Rust	<b>35K</b> 3500k		<b>ELV</b> ELV Dimming	
	<b>BK</b> Textured Black	<b>4K</b> 4000k			
	<b>WH</b> Textured White	<b>5K</b> 5000k			
	<b>CC</b> Custom Color	<b>BLU</b> Static Blue			
		<b>GRN</b> Static Green			
	<b>RED</b> Static Red				
	<b>RGBW</b> RGBW Consult factory for control details				

80 CRI STANDARD - OTHER OPTIONS AVAILABLE