

PRODUCT CODE					

PROJECT


TYPE

PADO







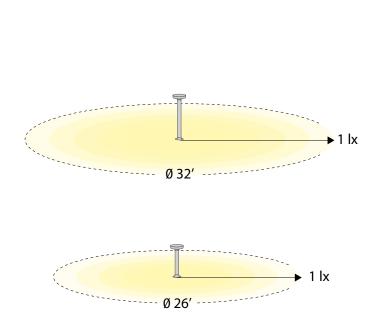

ALLUMINIUM METALLIC WHITE LED

PADO 38"






Landscaping bollard luminaire in LED, featuring:

- ¬ Polyester powder coated die-cast aluminum housing
- ¬ Painted extruded aluminum post (h 900 mm) with base plate for the PADO 900 model (38"h OA)
- ¬ Powder polyester painting process optimized against UV rays in 13 different steps
- ¬ Internally frosted glass diffuser

- ¬ Silicone gasket
 ¬ Stainless steel locking screws
 ¬ External QUICK CONNECT, electrical connection with sealed plug-socket, complete with cable
- ¬ Complying with the recommendations for glare control and upward light pollution
- . ¬ Additional Heights are available; contact the factory for ordering information





IRON GRAY WHITE LED

SOCKET	POWER (W)	FINISH	IP	KELVIN	OPTIC TYPE	OPTIC BEAM	DELIVERED LUMENS (RLO)	LIFETIME	CULUS	UL	VOLTAGE	CODE
HIGH PC	OWER LEDS 120/	277 V DIMMABLE 0-10V										
LED	20 W	ALUMINUM METALLIC - WHITE LED	IP 65	3000	C/EW	-	1079 lm	60000 h	•		-	071643
LED	20 W	ALUMINUM METALLIC - WHITE LED	IP 65	4000	C/EW	-	1157 lm	60000 h			-	071644
LED	20 W	IRON GRAY - WHITE LED	IP 65	3000	C/EW	-	1079 lm	60000 h			-	071641
LED	20 W	IRON GRAY - WHITE LED	IP 65	4000	C/EW	-	1157 lm	60000 h			-	071642

PADO 26"






Landscaping bollard luminaire in LED, featuring:

- ¬ Polyester powder-coated die-cast aluminum housing
- ¬ Painted extruded aluminum post (h 600 mm) with base plate for the PADO 600 model (26"h OA)
- ¬ Powder polyester painting process optimized against UV rays in 13 different steps
- ¬ Internally frosted glass diffusers
- ¬ Silicone gasket
- ¬ Stainless steel locking screws
- ¬ External QUICK CONNECT, electrical connection with sealed plug-socket, complete with cable
- ¬ Complying with the recommendations for glare control and upward light
- ¬ Additional Heights are available; contact the factory for ordering information





ALLUMINIUM METALLIC WHITE I FD

IRON GRAY WHITE LED

SOCKET	POWER (W)	FINISH	IP	KELVIN	OPTIC TYPE	OPTIC BEAM	DELIVERED LUMENS (RLO)	LIFETIME	CULUS	UL	VOLTAGE	CODE
HIGH POWER LEDS 120/277 V DIMMABLE 0-10V												
LED	20 W	ALUMINUM METALLIC - WHITE LED	IP 65	3000	C/EW	-	1079 lm	60000 h			-	071639
LED	20 W	ALUMINUM METALLIC - WHITE LED	IP 65	4000	C/EW	-	1157 lm	60000 h	•		-	071640
LED	20 W	IRON GRAY - WHITE LED	IP 65	3000	C/EW	-	1079 lm	60000 h	•		-	071637
LED	20 W	IRON GRAY - WHITE LED	IP 65	4000	C/EW	-	1157 lm	60000 h	•		-	071638