

SL764+SL SINGLE HEAD



IP 20	650° C			
	27 kg			
IK 05	CLASS I	DALI	Ta Max. 40°C Min. 10°C	

No replaceable light source

Replaceable control gear by a professional



THIS PRODUCT CONTAINS LIGHT SOURCES OF ENERGY EFFICIENCY CLASS:

	3000 K	4000 K	2700-6500 K
CRI 90	D	D	-
CRI 80	D	D	-

IMPORTANT NOTE:
Before performing any exchange please contact ecodesignsupport.de@pil.lighting for technical instructions.




SL764+SL SINGLE

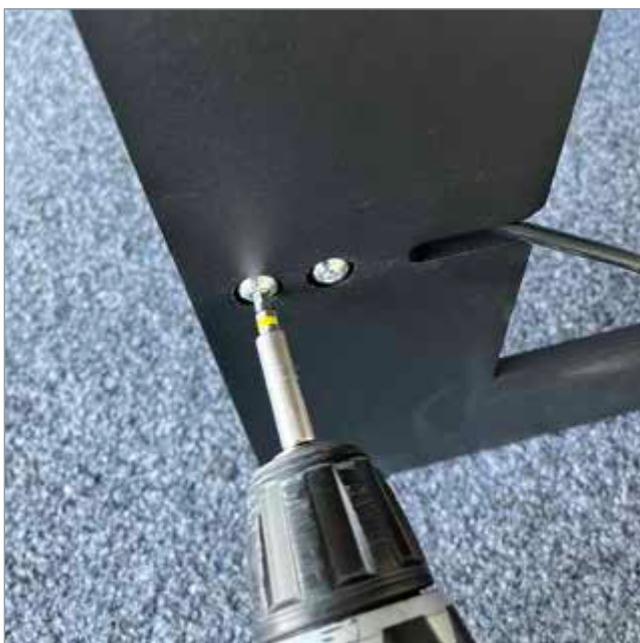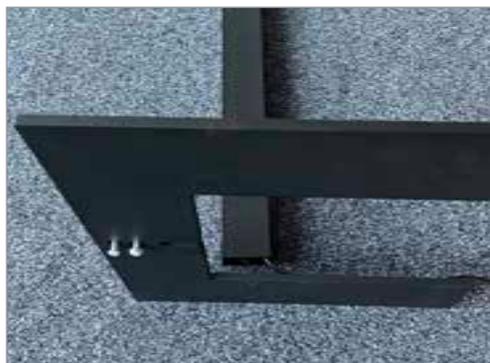

SL764+SL SINGLE



SL764+SL SINGLE

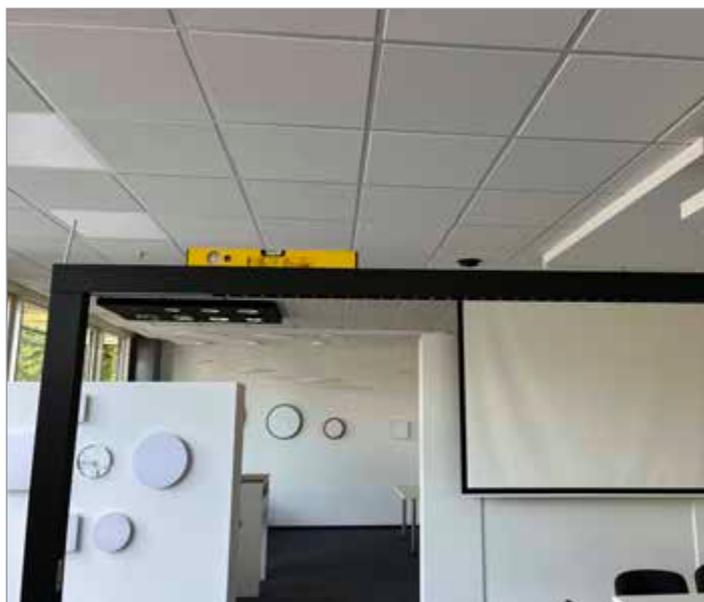

SL764+SL SINGLE

