

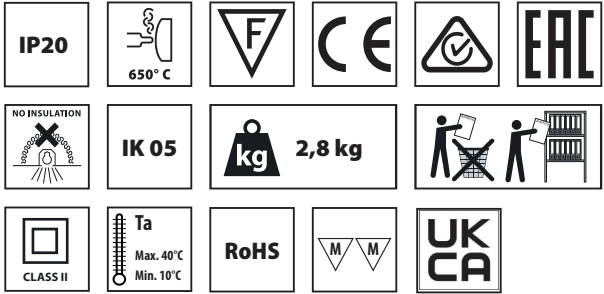


WL400 (DALI)



Terminal max.:
~240V / 10A
0,75 - 2,5 mm²




THIS PRODUCT CONTAINS LIGHT SOURCES OF ENERGY EFFICIENCY CLASS:







	3000 K	4000 K	2700-6500 K
CRI 80	E	E	-

IMPORTANT NOTE:
Before performing any exchange please contact ecodesignsupport.de@pil.lighting for technical instructions.

Model	Voltage	Wattage	CCT	W / Ø (mm)	H (mm)
WL400	220-240V	38/29W	3000K / 4000K	400	63



IEC/EN60598-1 IEC/EN60598-2-1 EN62471:2008 EN55015
EN61547 EN61000-3-1 EN61000-3-2



* DALI clamp only available in DALI version of WL400

Montageanleitung

- Folgen Sie dieser Montageanleitung um die korrekte Installation der Leuchte sicherzustellen.
- Bewahren Sie die Anleitung für zukünftige Fragen auf. Alle Arbeiten an dem Produkt sind im spannungsfreien Zustand durchzuführen.
- Der elektrische Anschluss ist nur von einer qualifizierten Elektrofachkraft durchzuführen.

Installation instruction

- Always follow this instruction to ensure correct and safe installation and functioning of the luminaire and keep it for future reference.
- Always isolate the power before commencing installation.
- If in doubt, consult a qualified electrician. Ensure that you always install the luminaire to the relevant regulations.