


# CHIP OVALE 25

Part number 005700

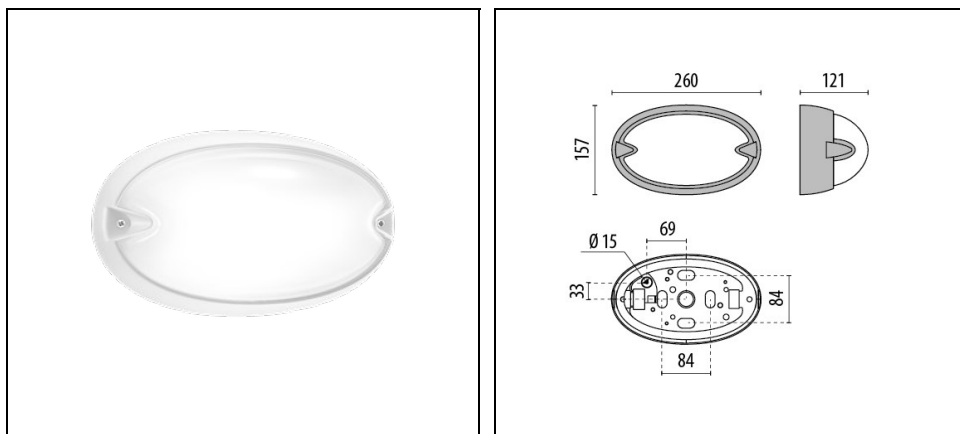

## Description

- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

|             |          |             |          |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC0028g2 |
|-------------|----------|-------------|----------|

## General information

|                          |        |                                    |                             |
|--------------------------|--------|------------------------------------|-----------------------------|
| Lampholder:              | E27    | Light source:                      | Fluorescent lamps           |
| Luminaire wattage [W]:   | 1x21 W | Colour / Finishing:                | WH-87 / White / Textured    |
| IP degree of protection: | IP55   | Impact resistance / impact energy: | IK06 1J xx3                 |
| Protection class:        | II     | Optic:                             | S/EW - Symmetric Extra-Wide |
| Net weight [kg]:         | 0.943  | Overall length [mm]:               | 260                         |
| Overall width [mm]:      | 121    | Overall height [mm]:               | 157                         |

## Mechanical features

|                    |             |                      |         |
|--------------------|-------------|----------------------|---------|
| Shape:             | Rectangular | Housing material:    | Plastic |
| Diffuser material: | Glass       | Glow wire test [°C]: | 750 °C  |

## Installation


|                                |                  |                                |          |
|--------------------------------|------------------|--------------------------------|----------|
| Application area:              | Outdoor lighting | Mounting type:                 | Bulkhead |
| Min. ambient temperature [°C]: | -30              | Max. ambient temperature [°C]: | 45       |

## Light features

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

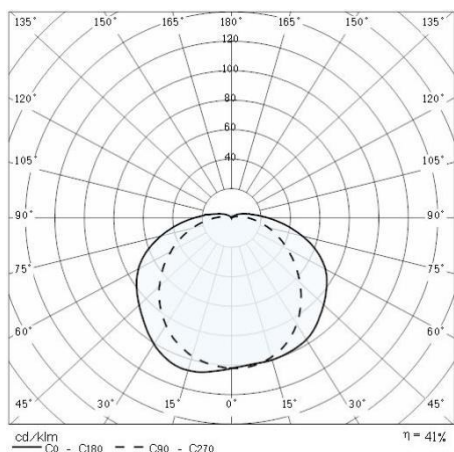

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>