


INSERT+ 1 MARINE

Part number 304791

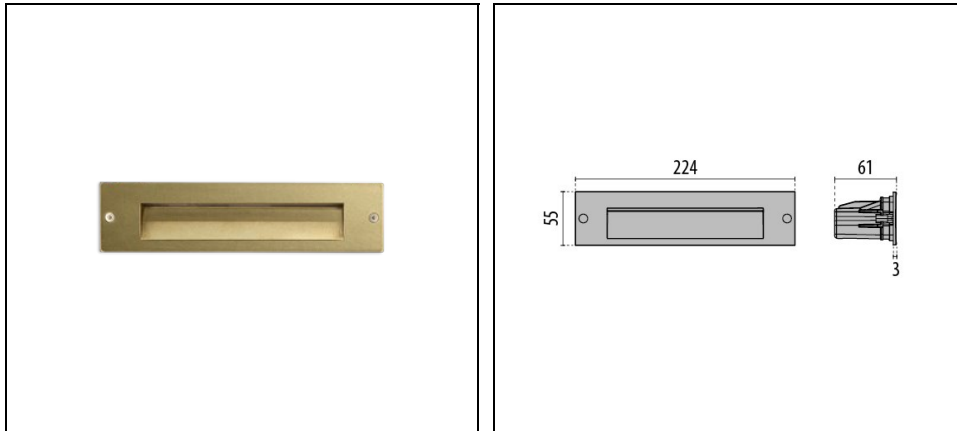

Description

Wall recessed luminaire, for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Die-cast polished brass ring ISO 9223 (CX)
- Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish
- Inner satin toughened flat glass diffuser
- EPDM sealing gasket
- Stainless steel locking hardware
- Supplied with 0,2 m pre-wired H07RN-F cable
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Electrical connector for cables $\varnothing 7 - \varnothing 12$ mm
- Recessed box to be ordered separately
- The recessed box removable cover features two integral spirit levels for installation ease
- Built-in driver

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	825	Luminaire lumen output [lm]:	325
Luminaire wattage [W]:	6 W	Luminous efficacy [lm/W]:	54
CRI:	80	Colour temperature [K]:	3000
Colour / Finishing:	BR-10 / Natural brass / Glossy	IP degree of protection:	IP65
Impact resistance / impact energy:	IK07 2J xx5	Protection class:	I
Optic:	A37/M - Asymmetric Medium	Net weight [kg]:	0.614
Overall length [mm]:	224	Overall width [mm]:	64
Overall height [mm]:	55		

Mechanical features

Shape:	Rectangular	Housing material:	Brass
Diffuser material:	Glass		

Electrical features

Voltage type:	AC/DC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	0/50/60	Power factor / COS Φ :	0.6
Input voltage [V DC]:	176/264	Inrush current [A/ μ s]:	20 / 170
C10 1.5 mm ² :	52	C16 2.5 mm ² :	85
B10 1.5 mm ² :	31	B16 2.5 mm ² :	50

Installation


Application area:	Outdoor lighting	Mounting type:	Steplight
Min. ambient temperature [°C]:	-10	Max. ambient temperature [°C]:	35

Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

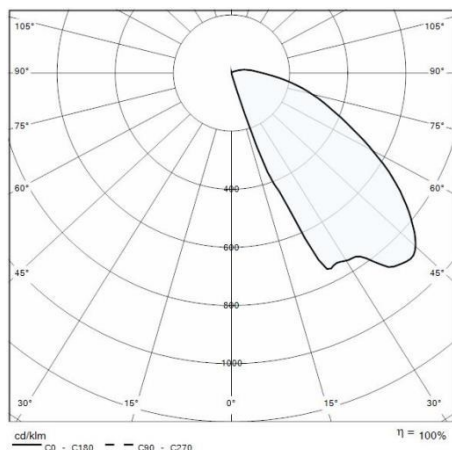

Mandatory accessories

INSERT+ 1 MARINE



310475

Recessed box INSERT+ 1