


MIMIK 10 FLAT M

Part number 304825

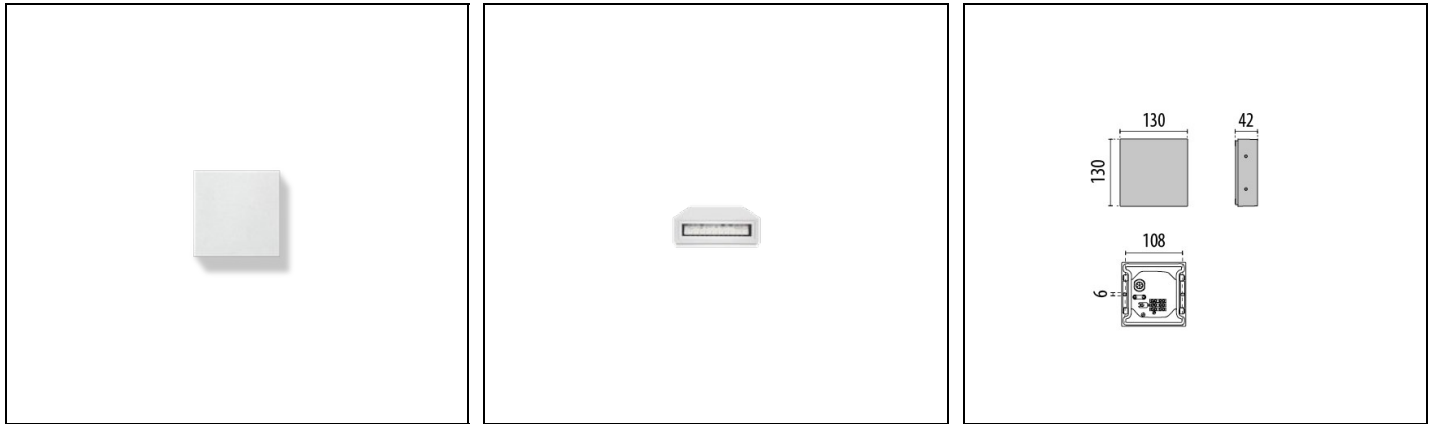

Description

Wall-mounted LED luminaire, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Built-in driver
- Stainless steel locking hardware
- Single (M) and dual (B) emission versions available
- The MIMIK versions are available with asymmetric (CP) or circular (C/I) optic options. In the dual emission versions (B), the two different beam types are combined.
- Optimised asymmetric distribution for wide spacing and lighting-class levels matching (CP options)
- Openable and maintainable luminaire (future-proof)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

| | | | |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC002892 |
|-------------|----------|-------------|----------|

General information

| | | | |
|------------------------------------|--------------------------|------------------------------|-------|
| Lampholder: | LED | Light source: | LED |
| Lightsource lumen output [lm]: | 650 | Luminaire lumen output [lm]: | 501 |
| Luminaire wattage [W]: | 5 W | Luminous efficacy [lm/W]: | 100 |
| CRI: | 80 | Colour temperature [K]: | 3000 |
| Colour / Finishing: | WH-87 / White / Textured | IP degree of protection: | IP65 |
| Impact resistance / impact energy: | IK06 1J xx3 | Protection class: | I |
| Optic: | A/W - Asymmetric Wide | Net weight [kg]: | 0.68g |
| Overall length [mm]: | 126 | Overall width [mm]: | 42 |
| Overall height [mm]: | 126 | | |

Mechanical features

| | | | |
|--------------------|----------------------|-------------------|-----------|
| Shape: | Square \leq 150 mm | Housing material: | Aluminium |
| Diffuser material: | Glass | | |

Electrical features

| | | | |
|------------------------------|--------|-----------------------------|---------|
| Voltage type: | AC | Input voltage [V AC]: | 220/240 |
| Input frequency [Hz]: | 50/60 | Power factor / COS Φ : | >0.9 |
| Inrush current [A/ μ s]: | 5 / 25 | C10 1.5 mm ² : | 64 |
| C16 2.5 mm ² : | 103 | B10 1.5 mm ² : | 64 |
| B16 2.5 mm ² : | 103 | | |


Installation

| | | | |
|--------------------------------|------------------|--------------------------------|---------------|
| Application area: | Outdoor lighting | Mounting type: | Exterior wall |
| Min. ambient temperature [°C]: | -20 | Max. ambient temperature [°C]: | 40 |

Light features


| | | | |
|---------------------------------|--------|----------------------------------|---------------|
| MacAdam: | 3 | Lumen maintenance: | L80B10@60000h |
| Distribution of light emission: | Direct | Zero light pollution (ULR = 0%): | |

Photometric data

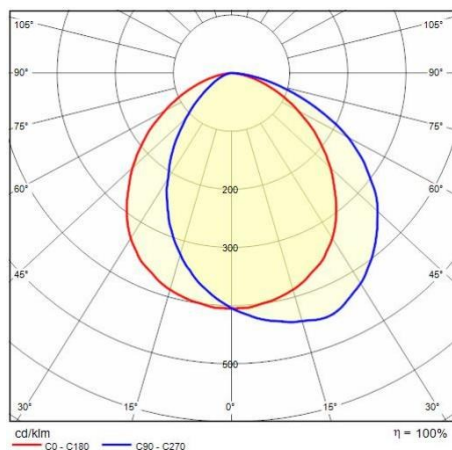

Optional accessories

MIMIK 10 - FLAT M

**3106088**

Customising ring / Facade Accessory

 WH-87 / White