

# NOTTURNO 1500

Part number 304923



## Description

Wall-mounted LED luminaire, comprising:

- Extruded anodised aluminium housing
- Toughened, glass diffuser, silk-screened on the inside
- Stainless steel AISI 304 end caps
- Aluminium heat sink
- For luminaire installation, please select the appropriate bracket (available as mandatory accessory)
- Dimmable DALI options available. Consult factory

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

ETIM Group:	EG000027	ETIM Class:	EC0028g2
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	6064	Luminaire lumen output [lm]:	4621
Luminaire wattage [W]:	54 W	Luminous efficacy [lm/W]:	86
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	GR-11 / Anodised grey / Matt	IP degree of protection:	IP66
Impact resistance / impact energy:	IK07 2J xx5	Protection class:	III
Optic:	S/I - Symmetric Intensive	Net weight [kg]:	5.371
Overall length [mm]:	1440	Overall width [mm]:	52
Overall height [mm]:	60		

## Mechanical features

Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Glass		

## Electrical features

Voltage type:	DC	Power factor / COS $\Phi$ :	>0.9
---------------	----	-----------------------------	------


## Installation

Application area:	Outdoor lighting	Mounting type:	Architectural floodlight
Min. ambient temperature [°C]:	-30	Max. ambient temperature [°C]:	50

## Light features


MacAdam:	3	Lumen maintenance:	L80B10@60000h
Zero light pollution (ULR = 0%):			

## Photometric data

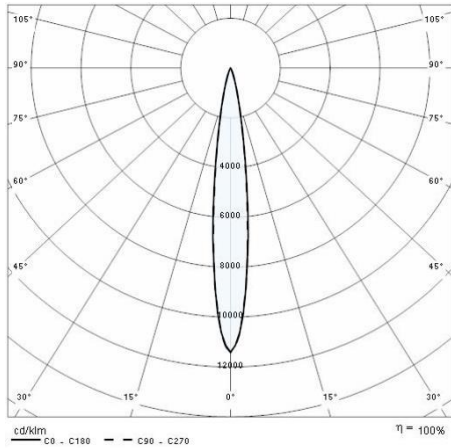

## Control gear

### NOTTURNO

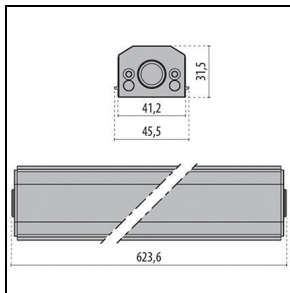


#### 310543

Power Supply Unit L1000/1500

## Mandatory accessories


### NOTTURNO

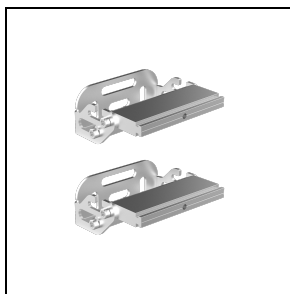

#### 310523

Bracket NOTTURNO (nr. 2)

■ GR-11 / Anodised grey



#### 310524

Bracket (nr. 2)

■ INOX / Stainless steel

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>



**310978**

NOTTURNO Telescopic bracket (nr. 2)

■ GR-11 / Anodised grey



**310981**

NOTTURNO ground support bracket (nr. 2)

■ GR-11 / Anodised grey