

# MULTI+ 35 EM/1P

Part number 306141



## Description

Wall-mounted LED luminaire, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel, anti-tampering locking screws
- Through-wiring designed
- Class II
- Max 20 mm diameter for cable/conduit entry
- EM/1P are maintained emergency versions (1h)
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1377	Luminaire lumen output [lm]:	724
Luminaire wattage [W]:	10.5 W	Luminous efficacy [lm/W]:	69
CRI:	80	Colour temperature [K]:	3000
Colour / Finishing:	WH-87 / White / Textured	IP degree of protection:	IP65
Impact resistance / impact energy:	IK10 20J xxg	Protection class:	II
Optic:	S/EW - Symmetric Extra-Wide	Net weight [kg]:	1.215
Overall length [mm]:	128	Overall width [mm]:	85
Overall height [mm]:	358		

## Mechanical features

Shape:	Rectangular	Housing material:	Plastic
Diffuser material:	Plastic	Glow wire test [°C]:	960 °C
Anti-vandal screws:			

## Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60	Power factor / COS Φ:	>0.9
Inrush current [A/μs]:	39 / 2	C10 1.5 mm <sup>2</sup> :	28
C16 2.5 mm <sup>2</sup> :	46	B10 1.5 mm <sup>2</sup> :	28
B16 2.5 mm <sup>2</sup> :	46		

## Installation

Application area:	Outdoor lighting	Mounting type:	Bulkhead
Min. ambient temperature [°C]:	0	Max. ambient temperature [°C]:	25


## Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

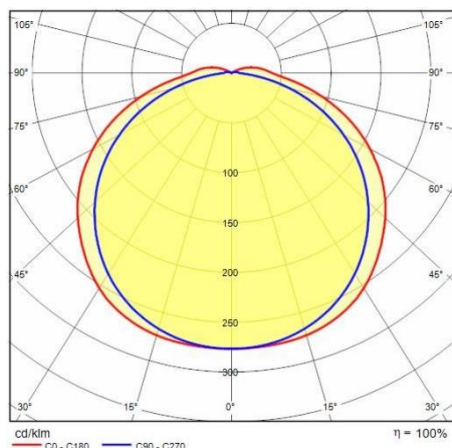

## Optional accessories

---

### MULTI+ 35



**310514**

Tool TORX