


MIMIK 10 POST 1000

Part number 306553

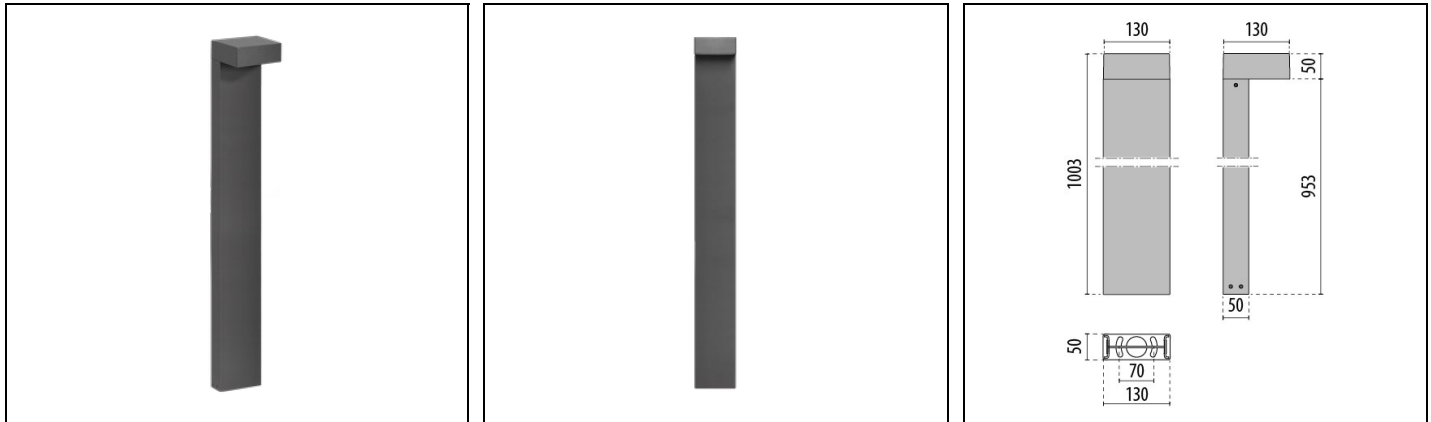

Description

Landscaping LED bollard, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Toughened, glass diffuser, silk-screened on the inside
- Satin finish pure aluminium reflector (Al 99.98)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Built-in driver
- Stainless steel locking hardware
- Extruded aluminium pole polyester powder coat finish ISO 9227/19244 - ISO 9223 (C5)
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Base plate included
- Metal sturdy bases for floor mounting are available as accessories (HU versions)
- Glare control and upward light pollution laws compliant (0% ULOR rating)
- Openable and maintainable luminaire (future-proof)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC000301
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1076	Luminaire lumen output [lm]:	780
Luminaire wattage [W]:	10 W	Luminous efficacy [lm/W]:	78
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	AN-g6 / Anthracite gray / Textured	IP degree of protection:	IP65
Impact resistance / impact energy:	IK08 5J xx5	Protection class:	I
Optic:	CP/T3 - Cycle/Pedestrian Type III	Net weight [kg]:	3.008
Overall length [mm]:	130	Overall width [mm]:	130
Overall height [mm]:	1003		

Mechanical features

Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	Input frequency [Hz]:	220-240V 50/60Hz
Power factor / COS Φ :	>0.9	C10 1.5 mm ² :	52
C16 2.5 mm ² :	85	B10 1.5 mm ² :	31
B16 2.5 mm ² :	50		

Installation


Application area:	Outdoor lighting	Mounting type:	Garden post
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	35

Light features

MacAdam:	5	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct	Luminous Intensity Class:	G*3
Zero light pollution (ULR = 0%):		IPEA* (road lighting):	B
IPEA* (large areas, roundabouts):	B	IPEA* (cycle-pedestrian):	B
IPEA* (green areas):	B	IPEA* (historic city centers):	B

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/gr/company/led-warranty>

Photometric data

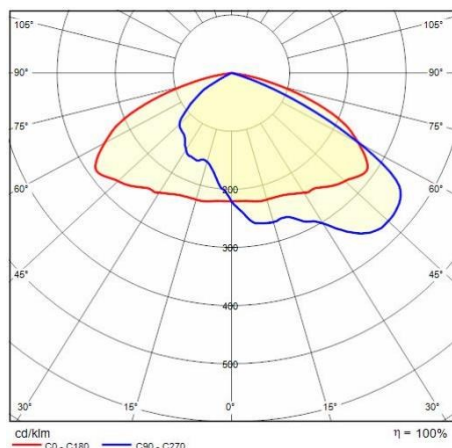

Optional accessories

MIMIK 10 POST



310496

Connection Kit Y 3-way \varnothing 7-10,5 mm
IP68