

BLIZ MARINE

Part number 3100278



Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Die-cast corrosion resistant aluminium housing
- Die-cast marine brass guard/screen with mass finishing process ISO 9223 (CX)
- Pressed glass diffuser, internally coated
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- EPDM sealing gasket
- Stainless steel locking hardware
- Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1584	Luminaire lumen output [lm]:	616
Luminaire wattage [W]:	13.5 W	Luminous efficacy [lm/W]:	46
CRI:	80	Colour temperature [K]:	3000
Colour / Finishing:	BR-10 / Natural brass / Glossy	IP degree of protection:	IP66
Impact resistance / impact energy:	IK07 2J xx5	Protection class:	I
Optic:	S/EW - Symmetric Extra-Wide	Net weight [kg]:	3.32
Overall length [mm]:	270	Overall width [mm]:	91
Overall height [mm]:	169		

Mechanical features

Shape:	Rectangular	Housing material:	Brass
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60	Power factor / COS Φ :	>0.95
Surge protection Common [kV]:	4.000000	Inrush current [A/ μ s]:	45 / 20
C10 1.5 mm ² :	50	C16 2.5 mm ² :	80
B10 1.5 mm ² :	30	B16 2.5 mm ² :	48

Installation


Application area:	Outdoor lighting	Mounting type:	Bulkhead
Min. ambient temperature [°C]:	-10	Max. ambient temperature [°C]:	35

Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

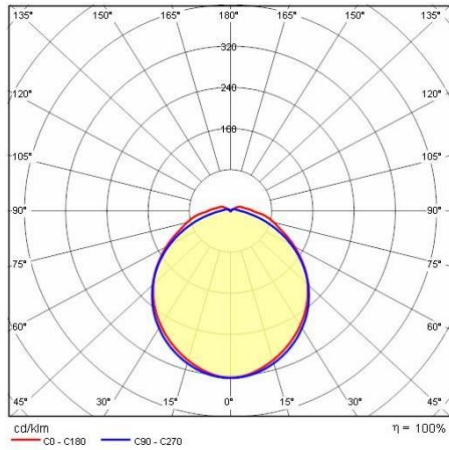

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>