


MASK+ ROUND

Part number 3105005

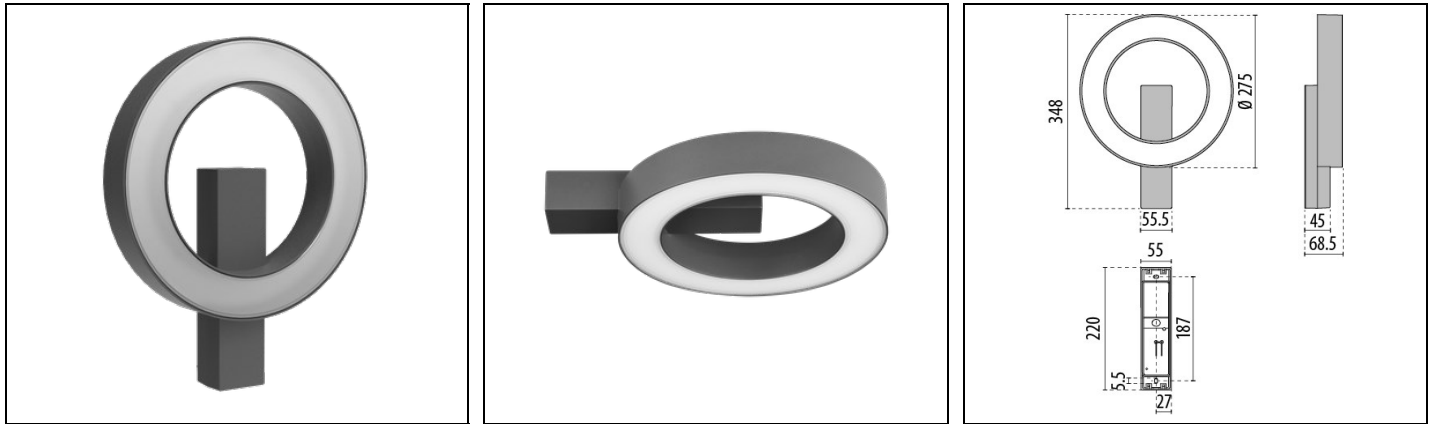

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Die-cast aluminium base for wall and ceiling applications, painted
- Glass diffusers, internally coated, for homogeneous light distribution
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 1 kV
- Anti-ageing custom moulded silicone sealing gasket(s)
- Chromed steel spring locks for quick attachment of the body to the housing
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

| | | | |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC002892 |
|-------------|----------|-------------|----------|

General information

| | | | |
|------------------------------------|------------------------------------|------------------------------|-------|
| Lampholder: | LED | Light source: | LED |
| Lightsource lumen output [lm]: | 2590 | Luminaire lumen output [lm]: | 1188 |
| Luminaire wattage [W]: | 22 W | Luminous efficacy [lm/W]: | 54 |
| CRI: | 80 | Colour temperature [K]: | 3000 |
| Colour / Finishing: | AN-g6 / Anthracite gray / Textured | IP degree of protection: | IP65 |
| Impact resistance / impact energy: | IK06 1J xx3 | Protection class: | I |
| Optic: | S/EW - Symmetric Extra-Wide | Net weight [kg]: | 2.268 |
| Overall diameter [mm]: | 275 | Overall length [mm]: | 275 |
| Overall width [mm]: | 69 | Overall height [mm]: | 348 |

Mechanical features

| | | | |
|--------------------|--------------------------------|-------------------|-----------|
| Shape: | Round $150 \leq x \leq 300$ mm | Housing material: | Aluminium |
| Diffuser material: | Glass | | |

Electrical features

| | | | |
|---------------------------|-------|-----------------------------|---------|
| Voltage type: | AC | Input voltage [V AC]: | 220/240 |
| Input frequency [Hz]: | 50/60 | Power factor / COS Φ : | >0.9 |
| C10 1.5 mm ² : | 78 | C16 2.5 mm ² : | 123 |
| B10 1.5 mm ² : | 48 | B16 2.5 mm ² : | 77 |

Installation


| | | | |
|--------------------------------|------------------|--------------------------------|------------------|
| Application area: | Outdoor lighting | Mounting type: | Exterior ceiling |
| Min. ambient temperature [°C]: | -20 | Max. ambient temperature [°C]: | 35 |

Light features

| | | | |
|---------------------------------|--------|--------------------|---------------|
| MacAdam: | 3 | Lumen maintenance: | L70B10@54000h |
| Distribution of light emission: | Direct | | |

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

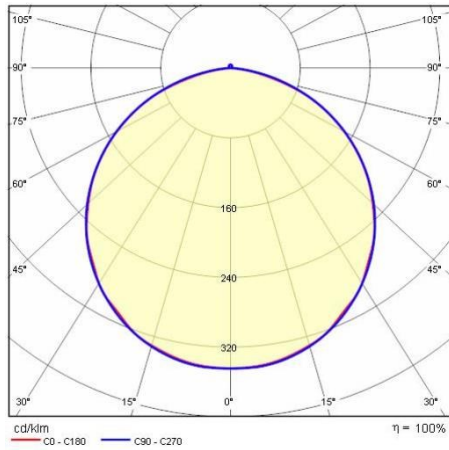

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>