

# AS425 LED SPOT REFLECTOR

Part number 3108534



## Description

LED track light for indoor, comprising:

- Extruded aluminium profile and die-cast aluminium spotlight housing, powder-coated
- Tilting and turning spotlight head
- High-brilliance spherical faceted reflector for maximum performance and neutral colour rendering index
- Bayonet-closure ring for a toolless replacement of the reflector and the louvre
- Reflector in Spot design
- Colour tolerance according to MacAdam  $\leq 3$  SDCM
- Universal tri-phase adaptor included
- Built-in driver
- Quick and toolless installation
- Clear safety glass
- The luminaire is suitable for installation on standard tracks such as EUROSTANDARD PLUS®

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

|             |          |             |          |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC001744 |
|-------------|----------|-------------|----------|

## General information

|                                    |  |                              |        |
|------------------------------------|--|------------------------------|--------|
| Lampholder:                        | LED                                      | Light source:                | LED    |
| Lightsource lumen output [lm]:     | 2580                                     | Luminaire lumen output [lm]: | 2190   |
| Luminaire wattage [W]:             | 20 W                                     | Luminous efficacy [lm/W]:    | 110    |
| CRI:                               | 80                                       | Colour temperature [K]:      | 3000   |
| Colour / Finishing:                | WH-RAL9010 / White<br>RAL9010 / Textured | IP degree of protection:     | IP20   |
| Impact resistance / impact energy: | IK02 0.2J xx0                            | Protection class:            | II     |
| Optic:                             | C/I - Circular Intensive                 | Beam angle:                  | 2 x 8° |
| Net weight [kg]:                   | 1.06                                     | Overall diameter [mm]:       | 95     |
| Overall length [mm]:               | 260                                      | Overall width [mm]:          | 95     |
| Overall height [mm]:               | 208                                      |                              |        |

## Mechanical features

|                    |                   |                      |           |
|--------------------|-------------------|----------------------|-----------|
| Shape:             | Round ≤ 150 mm    | Housing material:    | Aluminium |
| Diffuser material: | Transparent glass | Glow wire test [°C]: | 650 °C    |

## Electrical features

|                           |         |                           |         |
|---------------------------|---------|---------------------------|---------|
| Voltage type:             | AC      | Input voltage [V AC]:     | 220/240 |
| Input frequency [Hz]:     | 50/60   | Power factor / COS Φ:     | >0.9    |
| Inrush current [A/μs]:    | 10 / 34 | C10 1.5 mm <sup>2</sup> : | 40      |
| C16 2.5 mm <sup>2</sup> : | 64      | B10 1.5 mm <sup>2</sup> : | 40      |
| B16 2.5 mm <sup>2</sup> : | 64      | EEL:                      | A2      |

## Installation

|  |                 |                                |            |
|--|-----------------|--------------------------------|------------|
| Application area:                      | Indoor lighting | Mounting type:                 | Tracklight |
| Min. ambient temperature [°C]:         | -20             | Max. ambient temperature [°C]: | 40         |
| Min. distance from lighted object [m]: | 0.10            |                                |            |


## Light features

|                                 |        |                    |               |
|---------------------------------|--------|--------------------|---------------|
| MacAdam:                        | 3      | Lumen maintenance: | L80B10@60000h |
| Distribution of light emission: | Direct | UGR max.:          | 13.7          |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

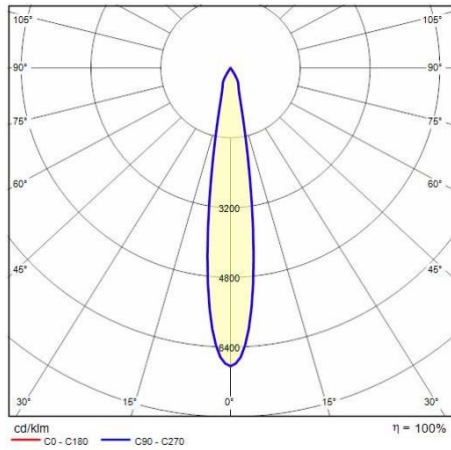

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>