


STRIP SQUARE+ 1284 RGBW

Part number 3109342

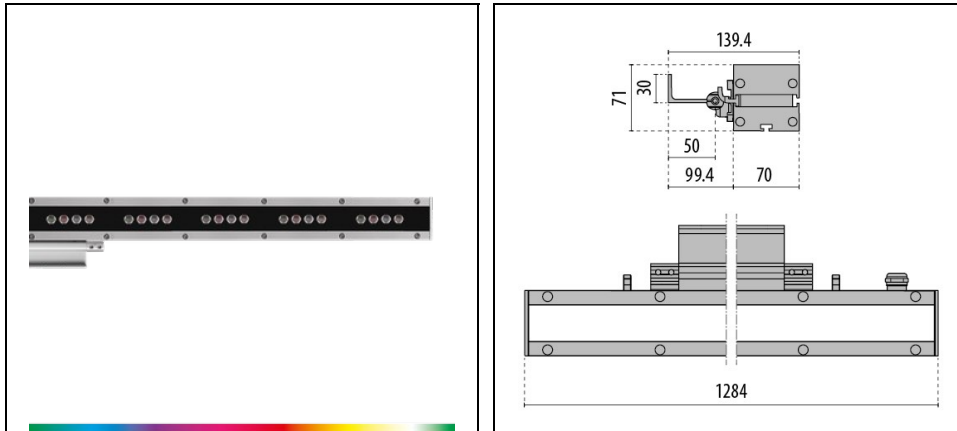

Description

Indoor and outdoor wall-mount luminaire, comprising:

- Extruded anodised aluminium housing
- Toughened, glass diffuser, silk-screened on the inside
- Coated die-cast aluminium end caps
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel locking hardware
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Adjustable wall mounting bracket for directing the luminaire
- High heat-dissipating aluminium gear tray for increased inner components lifespan
- DMX signal generator for RGBW versions available (ordered separately)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	3209	Luminaire lumen output [lm]:	1965
Luminaire wattage [W]:	32 W	Luminous efficacy [lm/W]:	61
CRI:	80	Colour temperature [K]:	rgbw 2700
Colour / Finishing:	GR-11 / Anodised grey / Matt	IP degree of protection:	IP66
Impact resistance / impact energy:	IK10 20J xxg	Protection class:	III
Optic:	ELL - Elliptical	Beam angle:	15°x45°
Net weight [kg]:	6.812	Overall length [mm]:	1284
Overall width [mm]:	139	Overall height [mm]:	71

Mechanical features

Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	DC	Power factor / COS Φ :	>0.9
Input voltage [V DC]:	48		


Installation

Application area:	Outdoor lighting	Mounting type:	Architectural floodlight
Min. ambient temperature [°C]:	-10	Max. ambient temperature [°C]:	35

Light features

MacAdam:	3	Lumen maintenance:	L80B10@6000h
Zero light pollution (ULR = 0%):			

Photometric data

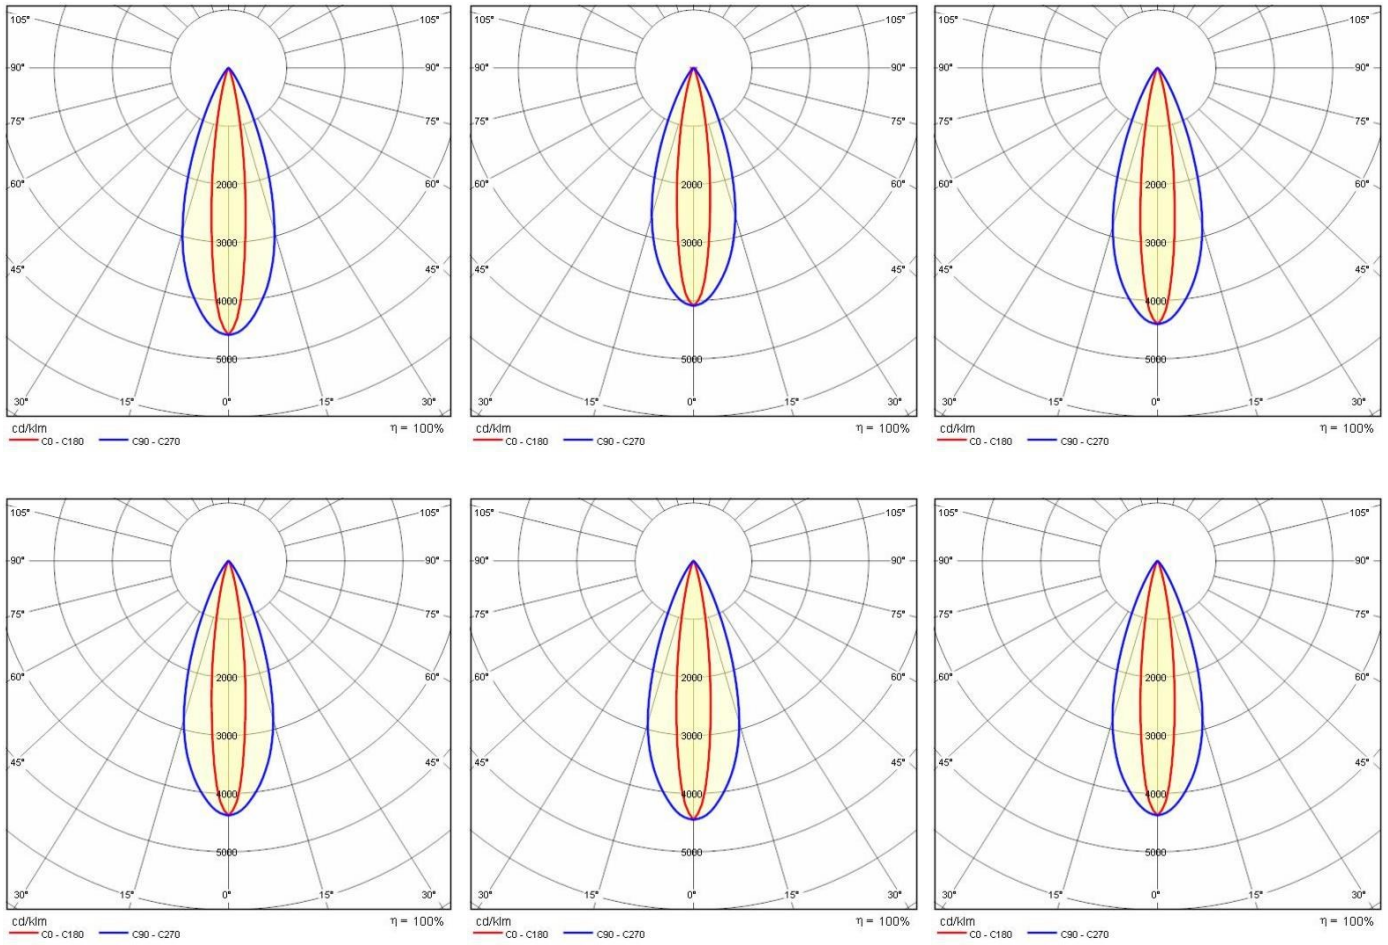

Control gear

STRIP SQUARE+




310950
Driver - CV 100 W - 48 V kit



310951
Driver - CV 500 W - 48 V kit

STRIP SQUARE+ RGBW

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>



3117844
Controller DMX touch white
 WH-87 / White



3117845
Controller DMX touch black
 BK-81 / Black



3115612
USB key EcoEcco

Optional accessories

STRIP SQUARE+



3114174
Connector 4 way IP68



310496
Connection Kit Y 3-way Ø 7-10.5 mm
IP68



310495
Connection Kit Y 3-way Ø 14-17 mm
IP68

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>