


# STRIP SQUARE+ INGROUND 1300 RGBW

Part number 3109420

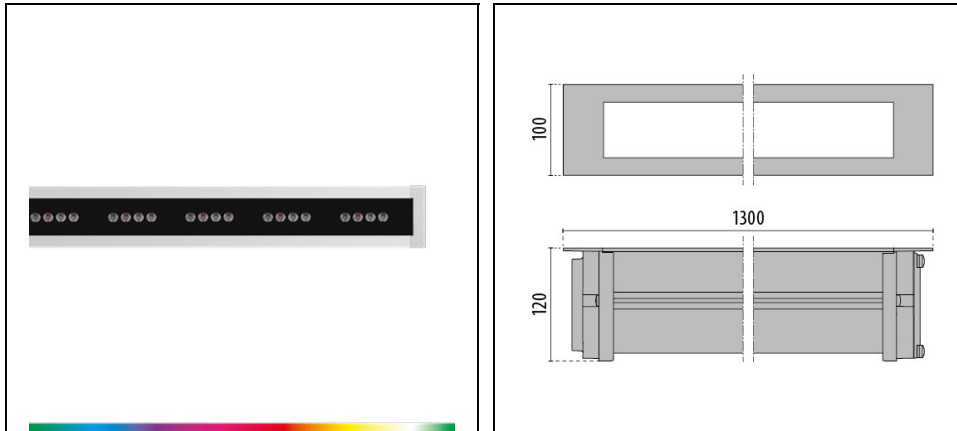

## Description

Recessed inground luminaire for interior and outdoor use comprising:

- Extruded anodised aluminium housing
- Toughened, glass diffuser, silk-screened on the inside
- Coated die-cast aluminium end caps
- Anti-ageing custom moulded silicone sealing gasket(s)
- Complete with IP-rated through wiring connection box (WATER-STOP) for cables  $\varnothing$  5 mm to  $\varnothing$  13 mm
- Stainless steel locking hardware
- High heat-dissipating aluminium gear tray for increased inner components lifespan
- Built-in driver
- DMX signal generator for RGBW versions available (ordered separately)
- Recessed box to be ordered separately
- Through-wiring designed

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

ETIM Group:	EG000027	ETIM Class:	EC000758
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	3209	Luminaire lumen output [lm]:	1965
Luminaire wattage [W]:	32 W	Luminous efficacy [lm/W]:	61
CRI:	80	Colour temperature [K]:	rgbw 2700
Colour / Finishing:	GR-11 / Anodised grey / Matt	IP degree of protection:	IP67
Impact resistance / impact energy:	IK10 20J xxg	Protection class:	III
Optic:	ELL - Elliptical	Beam angle:	15°x45°
Net weight [kg]:	11.46	Overall length [mm]:	1306
Overall width [mm]:	100	Overall height [mm]:	72

## Mechanical features

Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Glass	Dinamic load [kg]:	7500
Speed [km/h]:	30	Static load [kg]:	2000
Shear load [kN]:	5	Resistance to torque [Nm]:	50

## Electrical features

Voltage type:	DC	Power factor / COS $\Phi$ :	>0.9
Input voltage [V DC]:	48		


## Installation

Application area:	Outdoor lighting	Mounting type:	Inground
Min. ambient temperature [°C]:	-10	Max. ambient temperature [°C]:	35
Glass temperature [°C]:	35	Ingrounds classification:	A1 A2 A3 A4 A5

## Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
----------	---	--------------------	---------------

**Photometric data**

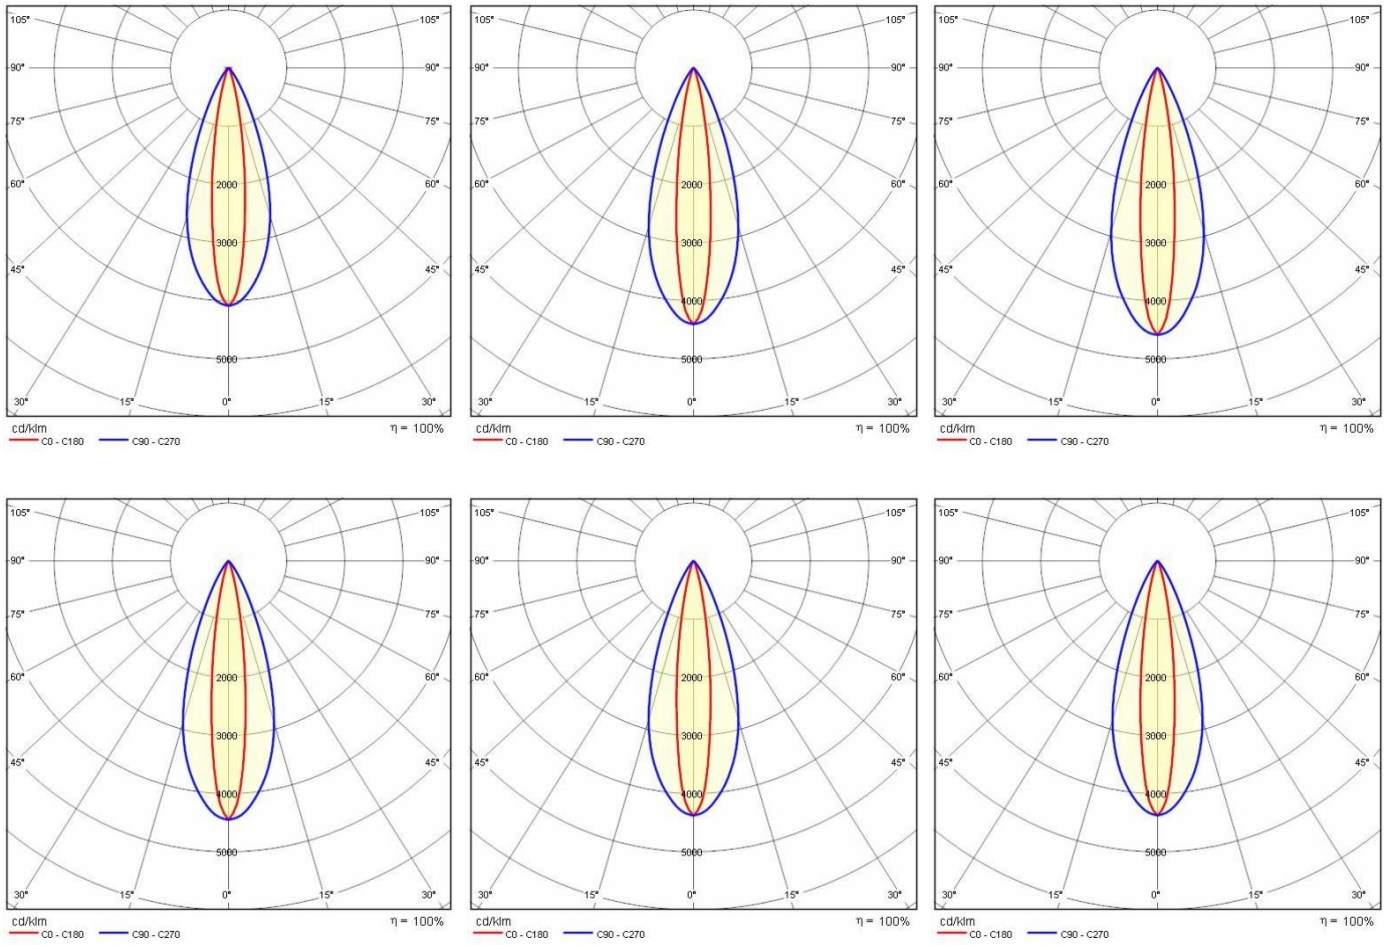

**Control gear**

**STRIP SQUARE+ INGROUND**



**310950**  
Driver - CV 100 W - 48 V kit



**310951**  
Driver - CV 500 W - 48 V kit

**STRIP SQUARE+ INGROUND RGBW**

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>



**3117844**  
Controller DMX touch white  
 WH-87 / White



**3117845**  
Controller DMX touch black  
 BK-81 / Black




**3115612**  
USB key EcoEcco

## Mandatory accessories

---

### STRIP SQUARE+ INGROUND



**310425**  
Recessed fixing kit L 1346 mm

## Optional accessories

---

### STRIP SQUARE+ INGROUND RGBW



**3109576**  
Box for RGBW continuous row