



# FL SQUARE 600 SM OP

Part number 8600691406400

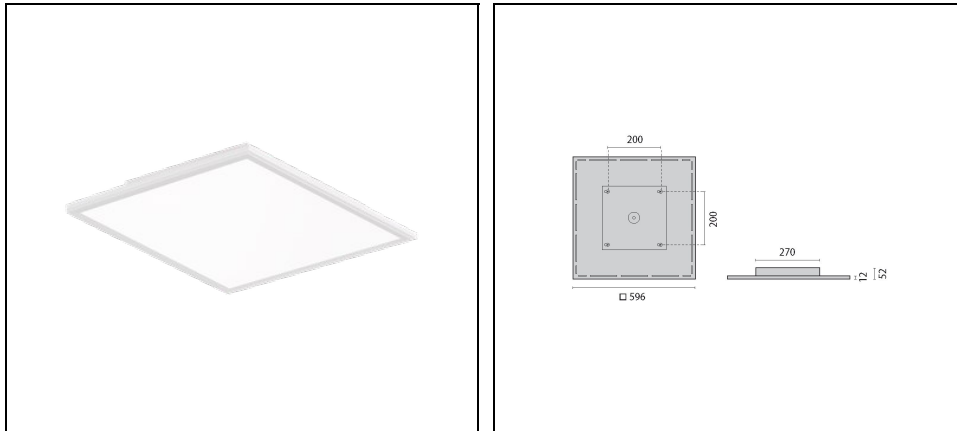

## Description

Surface-mounted quadratic LED luminaire for indoors, comprising of:

- Extruded aluminium housing profile, powder-coated
- LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the diffuser
- Predominantly direct light distribution
- DALI dimmable
- Colour tolerance according to MacAdam  $\leq 3$  SDCM
- Built-in driver

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	6310	Luminaire lumen output [lm]:	5000
Luminaire wattage [W]:	41 W	Luminous efficacy [lm/W]:	122
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	WH-RAL9016 / White RAL9016 / Textured	IP degree of protection:	IP20
Impact resistance / impact energy:	IK05 0.7J xx3	Protection class:	I
Optic:	S/B - Symmetric mainly direct	Beam angle:	2 x 56°
Net weight [kg]:	5.7	Overall length [mm]:	596
Overall width [mm]:	596	Overall height [mm]:	52

## Mechanical features

Shape:	Square $\geq 300$ mm	Housing material:	Aluminium
Diffuser material:	Plastic	Glow wire test [°C]:	650 °C

## Electrical features

Voltage type:	AC/DC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	220-240V 0/50/60Hz	Power factor / COS $\Phi$ :	0.9
Input voltage [V DC]:	176/280	Inrush current [A/ $\mu$ s]:	26 / 264
C10 1.5 mm <sup>2</sup> :	16	C16 2.5 mm <sup>2</sup> :	26
B10 1.5 mm <sup>2</sup> :	10	B16 2.5 mm <sup>2</sup> :	16
EEL:	A1		

## Installation

Application area:	Indoor lighting	Mounting type:	Wall and ceiling surface
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40


## Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct/Indirect	DFF - Downward Flux Fraction [%]:	94
UFF - Upward Flux Fraction [%]:	6	UGR max.:	18.0

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

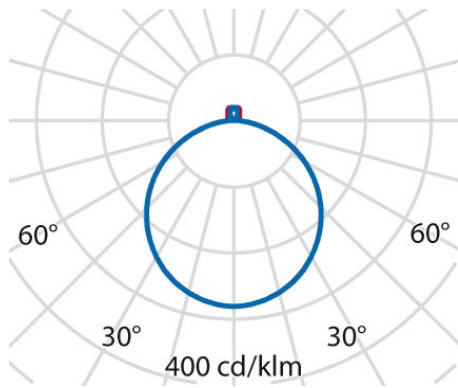

## Optional accessories

---

### FL SQUARE SM



**3122584**  
Casambi module for installation



**3122586**  
Single wireless wall switch  
 WH-87 / White



**3122587**  
Double wireless wall switch  
 WH-87 / White