


ALU LINEAR

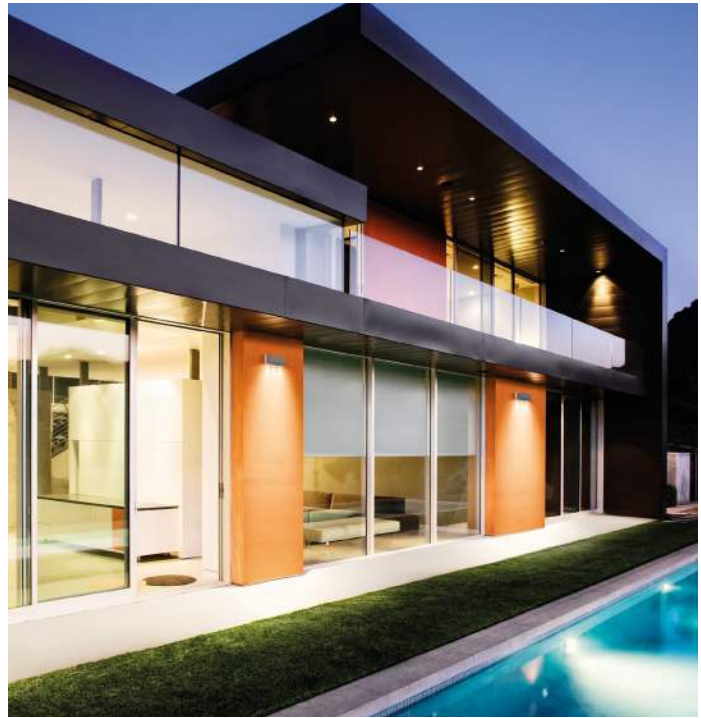

Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Single (M) or dual (B) light emission.
- 6° x 6° beam angle (C/I).
- 25° x 25° beam angle (C/M).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be remoted). Consult factory for more information.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

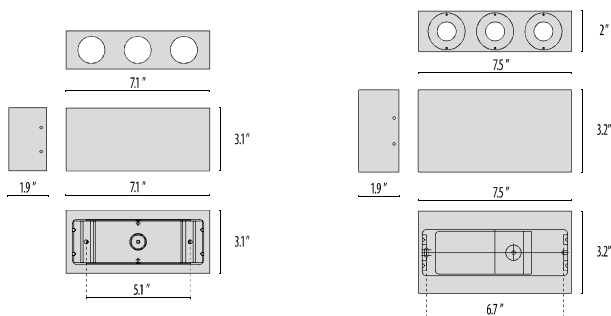

ALU LINEAR
(remote driver)

ALU LINEAR
120-177

Lumen Output	27K	3K	35K	4K	6K
Alu Linear M	186	197	208	219	242
Alu Linear B	372	394	417	439	484
Alu Linear 120-277V M ELL	225	236	255	270	304
Alu Linear 120-277V B ELL	437	470	506	539	609
Alu Linear 120-277V M 6°	275	296	317	338	380
Alu Linear 120-277V B 6°	551	593	635	677	761
Alu Linear 120-277V M 25°	213	231	248	266	302
Alu Linear 120-277V B 25°	427	462	497	533	604
Alu Linear 120-277V M 40°	251	270	289	308	347
Alu Linear 120-277V B 40°	500	539	577	616	694

8.9W Max Wattage - M
14W Max Wattage - B



Scan here
for installation
instructions

Order Guide - Alu Linear



Order code example

ALI-M-RDR-6-AA-3K-UNV-NA-JBOX

Series	Light Emission	Housing Style	Optics	Finish	Kelvin	Voltage	Controls	Accessories
ALI Alu Linear	M (One-Way)	RDR Remote driver	6 6°	Anodized Finishes: AA Anodized Aluminum NOT AVAILABLE with IDR AB Anodized Black NOT AVAILABLE with IDR Painted Finishes: IG Iron Gray IR Iron Rust WH Textured White CC Custom Color	27K 2700K	UNV 120-277V	NA Non Dimming	JBOX Jbox cover REM Remote Emergency Battery Back-up BABAA Build America Buy America Act Compliant
	B (Two-Way)	IDR Intregal driver	25 25° 40 40° ELL 10°x45° WB* Wide Beam *RDR ONLY* SELECT ONE FOR M SELECT TWO FOR B		3K 3000K 35K 3500K 4K 4000K 6K 6000K RED Static Red GRN Static Green BLU Static Blue AMB 590nm Amber (turtle-friendly)		0-10V 0-10V Dimming ELV 120V Remote Line-Voltage Dimming Driver For more Options Contact Factory	

80 CRI STANDARD - OTHER OPTIONS AVAILABLE