ALU WALL

Wall effect series. Fixtures consist of:
- ¬ Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- ¬ Copper-free precision machined anodized aluminum housing and optical compartment.
- ¬ Satin UV-stabilized diffuser.
- ¬ Custom molded, anti-aging gasket(s).
- ¬ Stainless steel external hardware.
- ¬ Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- ¬ Wall effects light emission.
- ¬ Single (M) or dual (B) light emission.

- ¬ To be used with a low-voltage, constant-current (700 mA) driver (ordered separately, consult factory for more information).
- ¬ Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- ¬ Matching junction box plate optional accessory available (ordered separately).
- ¬ Product meets Buy American Act requirements within ARRA.
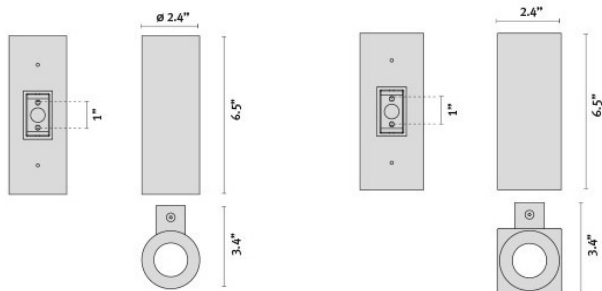- ¬ 5-year warranty.
- ¬ Marine Grade finish.

| IP 65 | WET | c(UL)us LISTED | ADA COMPLIANT | RAL | IK 06 1 J |

FINISHES
- ● BK-40 / Anodized black / Matt
- ◦ GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30
- ● AN-96 / Iron gray / Textured
- ● BK-81 / Black / Textured
- ◦ GR-94 / Aluminum metallic / Textured
- ○ WH-87 / White / Textured
- ● RB-10 / Iron rust / Textured

ALU WALL/R
ø 2.4" · 1" · 6.5" · 3.4"

ALU WALL/S
2.4" · 1" · 6.5" · 3.4"

Lumen Output	27K	3K	35K	4K	6K
Alu Wall R/ B	106	112	117	123	135
Alu Wall R/M	53	56	59	62	68
Alu Wall S/B	106	112	117	123	135
Alu Wall S/M	53	56	59	62	68

2.1W Max Wattage - M
4.2W Max Wattage - B

Scan here for installation instructions

Order Guide - Alu Wall

| Order code example | **AW-B-R-AA-3K-120-NA-RDR** |

AW-

Light Emission	Housing Style	Finish	Kelvin	Voltage	Controls	Accessories
M (One-Way) **B** (Two-Way)	**R** Round Housing **S** Square Housing	**AA** Anodized Aluminum **AB** Anodized Black ***Finishes Below Available MOQ30 pieces*** **AM** Aluminum Metallic **IG** Iron Gray **IR** Iron Rust **BK** Textured Black **WH** Textured White **CC** Custom Color	**27K** 2700k **3K** 3000k **35K** 3500k **4K** 4000k **6K** 6000k **RED** Static Red **GRN** Static Green **BLU** Static Blue **AMB** Static Amber	**UNV** 120-277V Remote Driver Voltage	**NA** Non Dimming **0-10V** 0-10V Dimming Remote **ELV** ELV Dimming Remote	**JBOX** Jbox cover **RDR** Remote driver, please specify quantity of fixtures per driver **REM** Remote battery pack, requires multiple fixtures wired in series

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 06
10/23