

ALU WALL



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Wall effects light emission.
- Single (M) or dual (B) light emission.

- To be used with a low-voltage, constant-current (700 mA) driver (ordered separately, consult factory for more information).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Matching junction box plate optional accessory available (ordered separately).
- 5-year warranty.
- Marine Grade finish.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

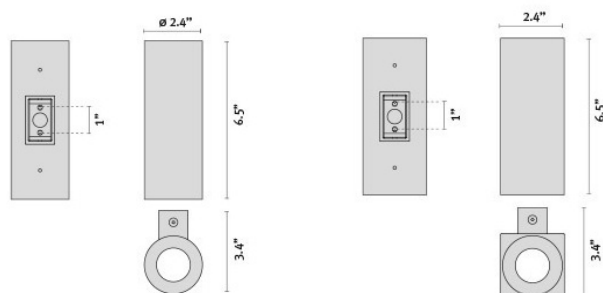

ALU
WALL/R

ALU
WALL/S

| Lumen Output | 27K | 3K | 35K | 4K | 6K |
|---------------|-----|-----|-----|-----|-----|
| Alu Wall R/ B | 106 | 112 | 117 | 123 | 135 |
| Alu Wall R/M | 53 | 56 | 59 | 62 | 68 |
| Alu Wall S/B | 106 | 112 | 117 | 123 | 135 |
| Alu Wall S/M | 53 | 56 | 59 | 62 | 68 |

2.1W Max Wattage - M

4.2W Max Wattage - B



Scan here
for installation
instructions

Revision 12
06/25

Order Guide - Alu Wall



Order code example

AW-B-R-AA-3K-120-NA-RDR

AW-

| Light Emission | Housing Style | Finish | Kelvin | Voltage | Controls | Accessories |
|--|---|---|--|--|--|--|
| M (One-Way) B (Two-Way) | R Round Housing S Square Housing | AA Anodized Aluminum AB Anodized Black *Finishes Below Available MOQ30 pieces* IG Iron Gray IR Iron Rust WH Textured White CC Custom Color | 27K 2700k 3K 3000k 35K 3500k 4K 4000k 6K 6000k RED Static Red GRN Static Green BLU Static Blue AMB 590nm Amber (turtle-friendly) | UNV 120-277V Remote Driver Voltage | NA Non Dimming 0-10V 0-10V Remote Dimming Driver ELV 120V Remote Line-Voltage Dimming Driver For more Options Contact Factory | JBOX Jbox cover RDR Remote driver, please specify quantity of fixtures per driver REM Remote battery pack, requires multiple fixtures wired in series BABAA Build America Buy America Act compliant (not available for all options) |

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 12
06/25