



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and top cap.
- Copper-free aluminum extruded post.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- IESNA Type V light distribution.

- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

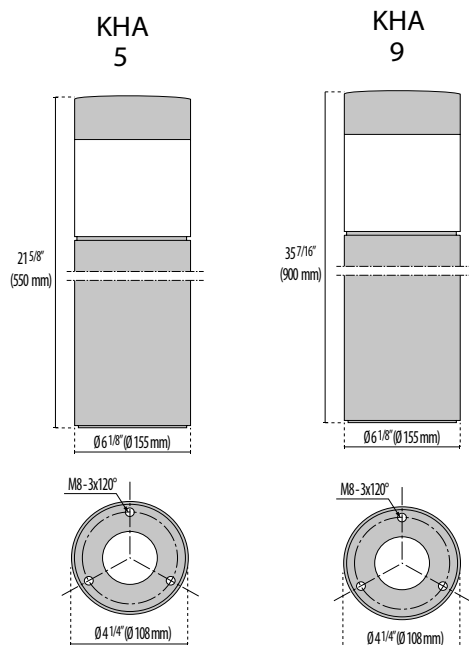

19W max wattage

Lumen Output	27K	3K	35K	4K	5K
Kha 5	1095	1182	1269	1356	1379
Kha 9	1095	1182	1269	1356	1379



Scan here
intallation
instructions

Order code example

KHA-5-19W-3K-SS-UNV-010V-HSS

Series	Bollard Height	Wattage	CCT	Finish	Voltage	Dimming	Options/ Accessories		
KHA Kha 5/9	5 22 inch	7W 7 watt	80 CRI std.	SS Stainless Steel	UNV 120-277V	010V 0-10V Dimming ELV 120V Line-Voltage Dimming Driver	LVR Internal louver (horizontal)		
	9 35 inch	12W 12 watt	27K 2700k	AM Aluminum Metallic			HSS House side shield		
	42 42 inch	19W 19 watt (max)	3K 3000k	IG Iron Gray			FRST Frosted diffuser		
	XX Specify height min 22"	XX Specify wattage must be below max	35K 3500k	IR Iron Rust			DB Direct burial		
			4K 4000k	BK Textured Black			BEV Bevelled post		
			5K 5000k	WH Textured White			BP Custom base plate		
			RED Static Red	CC Custom Color			DBURIAL Direct burial		
			BLU Static Blue	*See below for details			RGFCI Recessed outlet with cover- GFCI/USB (not available with KHA 5)		
			GRN Static Green				Template & Anchor bolts included with fixture		
			AMB Static Turtle Friendly Amber						

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

OPTIONAL ACCESSORIES

**LVR****BEV****HSS**