

# KHA SLIM 250



Slim area and site lighting series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free aluminum extruded post.
- Copper-free precision die-cast aluminum housing and top cap.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Diffuse light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

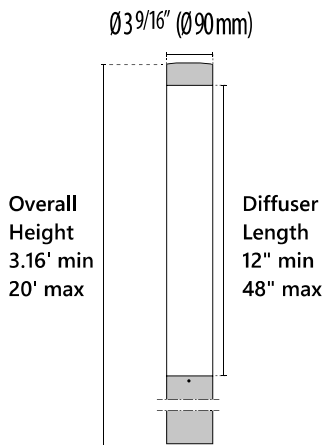


Lumen Output	Wattage	4K /80CRI
12" Diffuser	25W max	2595lm
24" Diffuser	50W max	5190lm
48" Diffuser	75W max	7800lm

Contact factory for other CCT's and reduced lumen options



Scan Here for  
Installation Instructions

KHA SLIM  
250

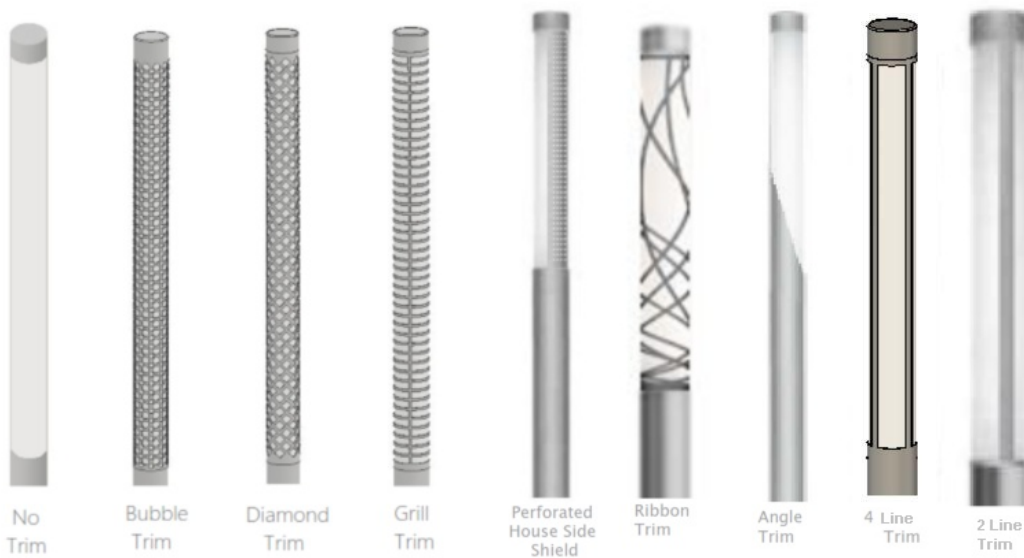

# Order Guide - Kha Slim 250

Order code example      **KHA250-XX-24-50-SS-3K-120-NA-DB**

KHA250							
Overall Column Height	Diffuser Size	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
38 38 inch 12" diffuser min	12 12" diffuser 25W Max	25 25 watt	SS Stainless Steel 96" Max OAH	27K 2700k	UNV 120-277V	NA Non Dimming	DB Direct Burial
50 50 inch 24" diffuser min	24 24" diffuser 50W Max	40 40 watt	AM Aluminum Metallic	3K 3000k		0-10V 0-10V Dimming	BT Bubble Trim
74 74 inch 48" diffuser min	48 48" diffuser 75W Max	50 50 watt	IG Iron Gray	35K 3500k		ELV ELV Dimming	DIA Diamond Trim
240 240 Inch max height		75 75 watt max	IR Iron Rust	4K 4000k			GRL Grill Trim
XX Specify Height Must be within range		XX Specify Wattage Must be below max	BK Textured Black	5K 5000k			PER Perforated Shield Full
			WH Textured White	65K 6500k			PHSS Perforated House Side Shield
			CC Custom Color	RED Static Red			RIB Ribbon Trim
				BLU Static Blue			ANG Angle Trim
				GRN Static Green			4L Four Line Trim
				AMB Static Amber			2L Two Line Trim
				RGBW RGBW* Only available with 24" diffuser See below for control details			OCC Occupancy Sensor Not Available with RGBW or with Trim options

## REMOTE RGBW ACCESSORIES

### Power Supply



**17433**  
Kit driver 48V



**17096**  
Kit driver 48V WP


### RF Controls



**3104173**  
RGBW RF controller 4 channel  
(0.35A each CH)



**31041730**  
RGBW RF controller WP 4 channel  
(0.35A each CH)



**310429**  
RGBW hand held remote

### DMX Controls



**178973**  
RGBW DMX enabler/decoder 4  
channel (0.35A each CH)



**1789730**  
RGBW DMX enabler/decoder WP 4  
channel (0.35A each CH)



**11015**  
Terminating Resistor



**110150**  
Terminating Resistor WP