

NIKKO+27



Open



Grill



V Shade

Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

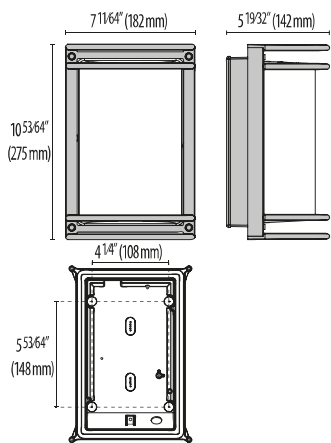

NIKKO
+27 LED

Lumen Output	27K	3K	35K	4K	5K
Nikko+27	1218	1248	1278	1309	1339
Nikko+27 Grill	638	654	670	686	718
Nikko+27 Visa	639	654	670	687	719

Order Guide - Nikko+27



Order code example

N27-OP-11-AM-3K-120-NA-WB

N27-

Trim Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
OP Open Trim	11 11 watt (max)	AM Aluminum Metallic	27K 2700k	120 120 volts	NA Non Dimming	REM Remote Mounted Emergency Battery Back Up
G Grill	XX Specify Wattage Must be below max	IG Iron Gray	3K 3000k	277 277 volts	0-10V 0-10V Dimming	WB Wall Bracket
V Shade		IR Iron Rust	35K 3500k		ELV ELV Dimming	P10 10.43" Post
		BK Textured Black	4K 4000k			P32 32.79" Post
		WH Textured White	5K 5000k			P48 48.54" Post
		CC Custom Color	65K 6500k			
			RED Static Red			
			BLU Static Blue			
			GRN Static Green			

