


# NIKKO+45



Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- Copper-free aluminum extruded post.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.

- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

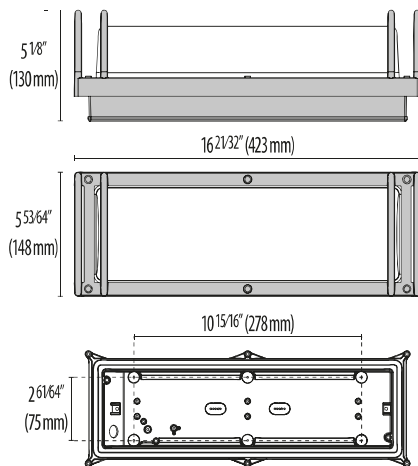

NIKKO  
+45 LED

Lumen Output	27K	3K	35K	4K	5K
<b>Nikko+45</b>	<b>664</b>	<b>702</b>	<b>740</b>	<b>778</b>	<b>816</b>
<b>Nikko+45 Grill</b>	<b>363</b>	<b>384</b>	<b>404</b>	<b>425</b>	<b>445</b>
<b>Nikko+45 Split</b>	<b>324</b>	<b>340</b>	<b>356</b>	<b>372</b>	<b>404</b>

# Order Guide - Nikko+45



Order code example

**N45-OP-24-AM-3K-120-NA-REM**

Trim Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
<b>OP</b> Open	<b>24</b> 24 watt (max)	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>120</b> 120 volts	<b>NA</b> Non Dimming	<b>REM</b> Remote Mounted Emergency Battery Back Up
<b>G</b> Grill	<b>XX</b> Specify Wattage Must be below max	<b>IG</b> Iron Gray	<b>3K</b> 3000k	<b>277</b> 277 volts	<b>0-10V</b> 0-10V Dimming  <b>ELV</b> ELV Dimming	<b>WB</b> Wall Bracket  <b>P16</b> 16.4" Post  <b>P32</b> 32.79" Post  <b>P48</b> 48.54" Post
<b>S</b> Split		<b>IR</b> Iron Rust	<b>35K</b> 3500k			
		<b>BK</b> Textured Black	<b>4K</b> 4000k			
		<b>WH</b> Textured White	<b>5K</b> 5000k			
		<b>CC</b> Custom Color	<b>65K</b> 6500k			
			<b>RED</b> Static Red			
			<b>BLU</b> Static Blue			
			<b>GRN</b> Static Green			

