
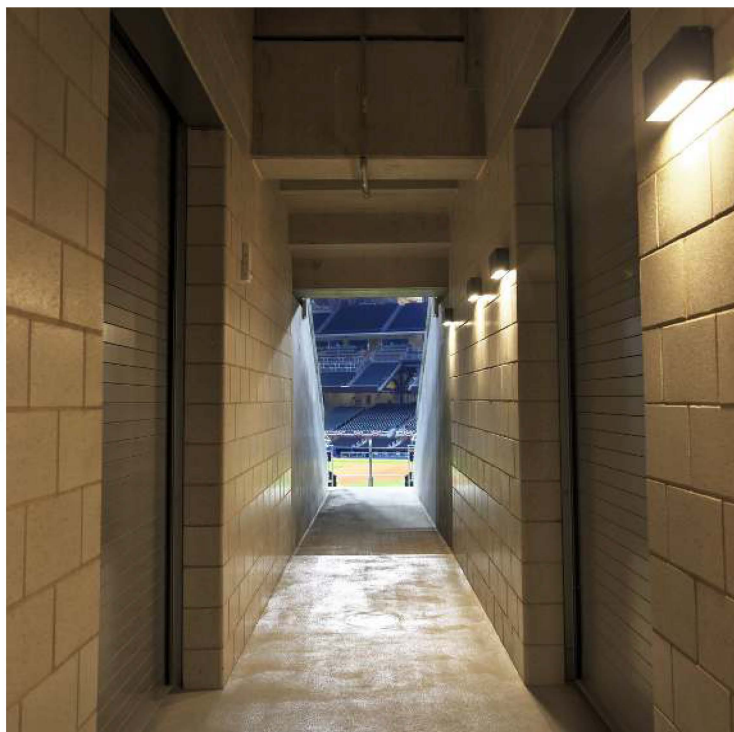


MIMIK 30

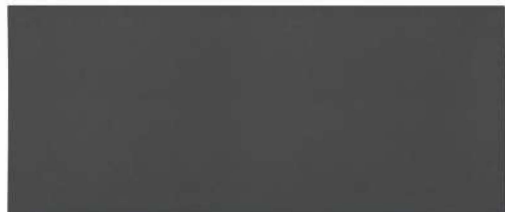

Wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion
- Copper-free precision die-cast aluminum housing and mounting plate
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser on standard models
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser on FLAT versions
- Custom molded, anti-aging gasket(s)
- Stainless steel external hardware
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life
- DarkSky approved when ordered with single light emission only, and in 3000K or below

- FLAT models only available in IESNA Type II light distribution
- Standard models utilize high-transmittance engineered transparent optics to deliver IESNA Type II, III and IV light distributions
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL#), and non-cataloged CCT options
- 5-year warranty
- Marine Grade finish
- Suitable for Natatorium applications




FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **BK-81** / Black / Textured
- **RB-10** / Iron rust / Textured

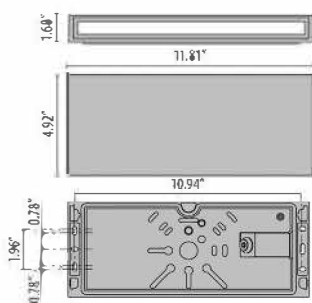

MIMIK
30 FLAT



MIMIK
30

LUMEN OUTPUT	27K	3K	35K	4K	5K	57K
MIMIK 30 M TYPE 2	514	546	566	589	599	723
22W	1439	1529	1586	1650	1677	2024
36W (MAX)	2399	2549	2644	2750	2796	3373
MIMIK 30 M TYPE 3	525	558	577	601	611	737
22W	1470	1562	1617	1682	1710	2063
36W (MAX)	2450	2603	2695	2803	2849	3438
MIMIK 30 M TYPE 4	487	518	536	558	567	684
22W	1364	1449	1501	1561	1587	1915
36W (MAX)	2276	2415	2501	2602	2645	3191

LUMEN OUTPUT	27K	3K	35K	4K	5K	57K
MIMIK 30 FLAT	584	602	620	638	656	674
14W	1022	1054	1085	1117	1148	1179
20W (MAX)	1461	1506	1551	1597	1552	1597



Scan here
for installation
instructions


M30-10W-4K-T4-AM-UNV-010V

--	--	--	--	--	--	--	--


70 CRI STANDARD HOUSING
80 CRI FLAT HOUSING
OTHER OPTIONS AVAILABLE

MIMIK 30


OCC




Facade Cover



PHC-B



Glare Shield



REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP