




Wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- IESNA Type II light distribution (Flat housing only available in Type II).
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- 5-year warranty.
- Marine grade finish.
- Suitable for Natatorium applications.

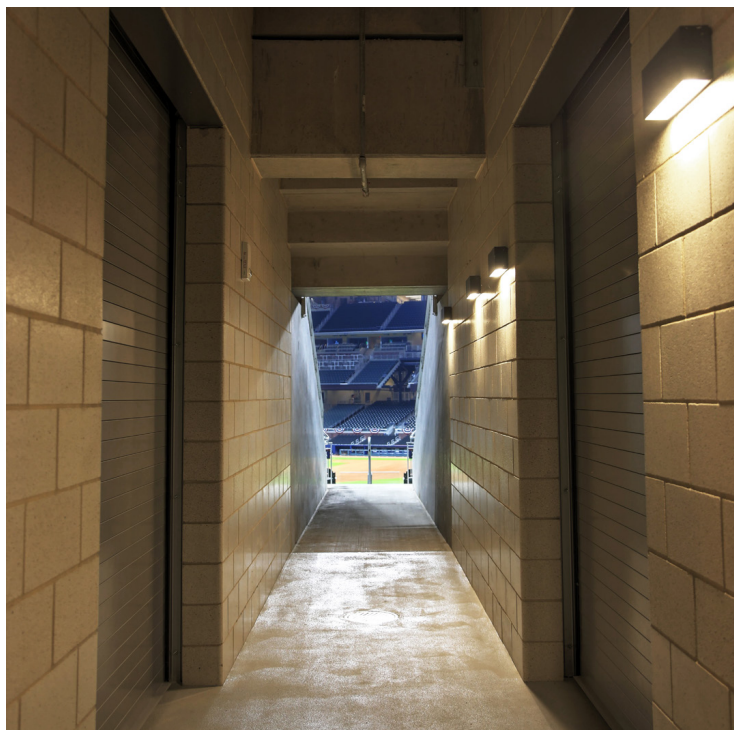


FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



MIMIK
30 FLAT



MIMIK
30

LUMEN OUTPUT	2700K	3000K	3500K	4000K	5000K	5700k
MIMIK 30 M TYPE 2						
8W (MIN)	514	546	566	589	599	723
22W	1439	1529	1586	1650	1677	2024
36W (MAX)	2399	2549	2644	2750	2795	3373
MIMIK 30 M TYPE 3						
8W (MIN)	525	558	577	601	611	737
22W	1470	1562	1617	1682	1710	2063
36W (MAX)	2450	2603	2695	2803	2849	3438
MIMIK 30 M TYPE 4						
8W (MIN)	487	518	538	558	567	684
22W	1364	1449	1501	1561	1587	1615
36W (MAX)	2276	2415	2501	2602	2645	3191
MIMIK 30 FLAT						
8W (MIN)	584	602	620	638	656	674
14W	1022	1054	1085	1117	1148	1179
20W (MAX)	1461	1506	1551	1597	1552	1597



Scan here for
installation
instructions

Order Guide - MIMIK 30


Order code example

M30F-18W-3K-T2-AM-UNV-010V-FC


Series	Light Emission	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
M30 Standard Housing	M One-way	8W 8 Watt (Min)	70 CRI std. housing	T2 Type 2	AM Aluminum Metallic	UNV 120-277V	010V 0-10V Dimming Driver	FC Facade cover (FLAT ONLY) FRST Frosted glass GC Glare shield PHC-B Photocell button (not available with EMPK) OCC Occupancy sensor (not available with EMPK) REM Remote battery backup
M30F Flat Housing		18W 18 Watt	80 CRI Flat housing	T3 Type 3	IG Iron Gray			
		20W 20 Watt (Max for flat housing)	27K 2700K	T4 Type 4	IR Iron Rust			
		23W 23 Watt	3K 3000K		WH Textured White			
		26W 26 Watt	35K 3500K		BK Textured Black			
		36W 36 Watt (Max Wattage for standard housing)	4K 4000K		CC Custom Color		ELV 120V line-voltage dimming driver	
		XX Specify wattage must be below max	See below for details					

OTHER OPTIONS ARE AVAILABLE (CONTACT FACTORY FOR AVAILABILITY)


OCC



Facade Cover



PHC-B



Glare Shield

