



Ceiling-, wall- and post- mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Post accessory available for MIMIK 20 (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Optional clear plexiglass panel can be customized with logos for signage or wayfinding (LINE BOLLARD). Consult factory for more information.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

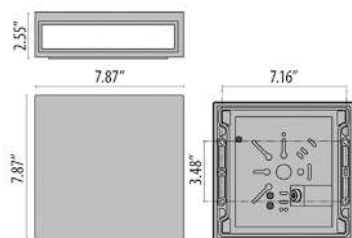

MIMIK
20
Standard

Lumen Output		2700K	3000K	3500K	4000K	5000K
MIMIK 20 T2	15W	1373	1335	1396	1408	1420
MIMIK 20 T2	26W	2238	2256	2274	2292	2310
MIMIK 20 T2 EMPK	15W	1373	1335	1396	1408	1420
MIMIK 20 T3	15W	1385	1396	1407	1418	1429
MIMIK 20 T3	26W	2255	2273	2291	2309	2327
MIMIK 20 T3 EMPK	15W	1385	1396	1407	1418	1429
MIMIK 20 T4	15W	1308	1319	1329	1340	1351
MIMIK 20 T4	26W	2132	2149	2166	2183	2200
MIMIK 20 T4 EMPK	15W	1308	1319	1329	1340	1351



Scan here
for installation
instructions

Order Guide - Mimik 20

70 CRI STANDARD HOUSING
OTHER OPTIONS AVAILABLE



Order code example

M20-M-15W-T4-AM-27K-120V-NA-FC

--	--	--	--	--	--	--	--	--	--

Housing Style	Light Emission	Wattage	Optics	Finish	CRI	Kelvin/ Static Colors	Voltage	Controls	Accessories
M20 Standard	M (One-Way)	15 15 watt (with EMPK max)	T2 Type II	AM Aluminum Metallic	70 70 CRI (Standard)	27K 2700k	UNV 120-277V	NA Non Dimming	EMPK Integral 15W Emergency Battery Back up (not available with flat housing or with phc/occ) CWEMPK Remote Cold Weather Emergency Battery Back up -20°C through 55°C FC Facade cover FRST Frosted glass EGR Egress Double Housing PHC-B Photocell Button (not available with empk) OCC Occupancy Sensor (not available with empk) REM Remote battery back up BOL 40" Bollard LBOL 40" Line Bollard XXBOL Specify Bollard Height 40" Max 12" Min XXLBOL Specify Line Bollard Height 40" Max 12"Min BABAA Build America Buy America Act compliant CON2 (double-gang j-box, adaptor plate and 1/2" knockouts) CON4 (double-gang j-box, adaptor plate and 3/4" knockouts)
		26 26 watt (standard) Max	T3 Type III	IG Iron Gray	80 80 CRI	3K 3000k		0-10V 0-10V Dimming	
		XX Specify Wattage Must be below max	T4 Type IV	IR Iron Rust	90* 90 CRI	35K 3500k		ELV 120V Line- Voltage Dimming Driver	
				BK Textured Black		4K 4000k			
				WH Textured White	*Contact Factory For Availability	5K* 5000K Consult factory for MOQ			
				CC Custom Color					

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 19
04/25

Performance in Lighting reserves the right to make all necessary changes without prior notice.

MIMIK 20

40" Bollard option




40" Line Bollard option



OCC



Facade Cover




PHC-B




Egress Double Housing




CON2 (1/2")



CON4 (3/4")



MIMIK 20 FLAT

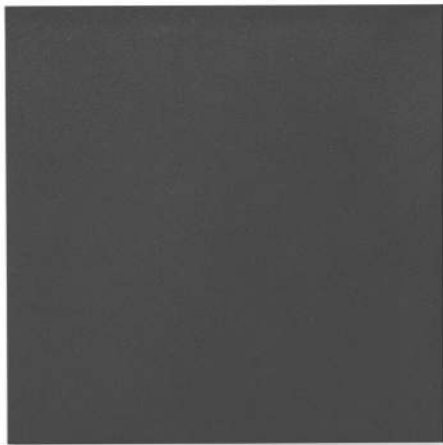

- Ceiling-, wall- and post- mount series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and mounting plate.
 - Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
 - Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - High-transmittance transparent optics.
 - Single (M) or dual (B) light emission.
 - IESNA Type II light distribution (FLAT).
 - DarkSky approved when ordered with single light emission only, and in 3000K or below.


- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Post accessory available for MIMIK 20 (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Optional clear plexiglass panel can be customized with logos for signage or wayfinding (LINE BOLLARD). Consult factory for more information.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

Lumen Output	2700K	3000K	3500K	4000K	5000K
MIMIK 20 FLAT M - 14W	919	960	1001	1042	1083
MIMIK 20 FLAT B - 25W	1847	1930	2012	2095	2178

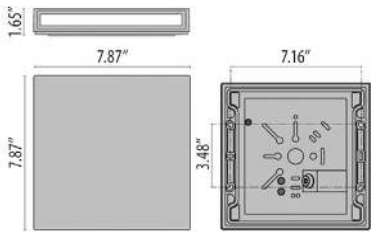

MIMIK
20 FLAT



Scan here
for installation
instructions

Order Guide - Mimik 20 Flat



Order code example

M20F-M-15W-T2-AM-27K-120V-NA-FC

80 CRI STANDARD
OTHER OPTIONS AVAILABLE

M20F-									
Housing Style	Light Emission	Wattage	Optics	Finish	CRI	Kelvin/ Static Colors	Voltage	Controls	Accessories
M20F Flat *Flat Housing is only suitable for T2 Distribution	M (One-Way) B (Two-Way)	14 14 watt (M Max)	T2 Type II	AM Aluminum Metallic	80 80 CRI (Standard)	27K 2700k	UNV 120-277V	NA Non Dimming	CWEMPK Remote Cold Weather Emergency Battery Back up -20°C through 55°C
		25 25 watt (B Max)		IG Iron Gray		3K 3000k			
		XX Specify Wattage Must be below max		IR Iron Rust	90* 90 CRI	35K 3500k		ELV 120V Line-Voltage Dimming Driver	FC Facade cover
				BK Textured Black	*Contact Factory For Availability	4K 4000k			FRST Frosted glass
				WH Textured White		5K* 5000K Consult factory for MOQ			EGR Egress Double Housing
				CC Custom Color		RED Static Red			PHC-B Photocell Button (not available with empk)
						GRN Static Green			OCC Occupancy Sensor (not available with empk)
						BLU Static Blue			REM Remote battery back up
						AMB Static Amber			BOL 40" Bollard
									LBOL 40" Line Bollard
									XXBOL Specify Bollard Height 40" Max 12" Min
									XXLBOL Specify Line Bollard Height 40" Max 12"Min
									BABAA Build America Buy America Act compliant
									CON2 (double-gang j-box, adaptor plate and 1/2" knockouts)
									CON4 (double-gang j-box, adaptor plate and 3/4" knockouts)

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 19
04/25

Performance in Lighting reserves the right to make all necessary changes without prior notice.

MIMIK 20 FLAT

