




Ceiling-, wall- and post- mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Optional clear plexiglass panel can be customized with logos for signage or wayfinding (LINE BOLLARD). Consult factory for more information.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.

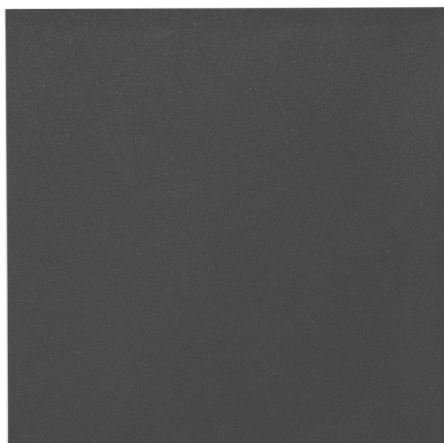


FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



**MIMIK 20
Standard**



**MIMIK 20
FLAT**

Lumen Output	Wattage	2700K	3000K	3500K	4000K	5000K
MIMIK 0 . R0	/3U	/151	/165	/174	/2.6	/20.
MIMIK 0 . R0	06U	0011	0036	0052	0070	01/. .
MIMIK 0 . R0 EMN I	/3U	/151	/165	/174	/2.6	/20.
MIMIK 0 . R1	/3U	/163	/174	/2.5	/2/6	/207
MIMIK 0 . R1	06U	0053	0051	0071	01.7	0105
MIMIK 0 . R1 EMN I	/3U	/163	/174	/2.5	/2/6	/207
MIMIK 0 . R2	/3U	/1.8	/1/9	/109	/140	/13/
MIMIK 0 . R2	06U	0/10	0/29	0/46	0/61	00. .
MIMIK 0 . R2 EMN I	/3U	/1.8	/1/9	/109	/140	/13/

Lumen Output	Wattage	2700K	3000K	3500K	4000K	5000K
MIMIK 20 FLAT M	14W	919	960	1001	1042	1083
MIMIK 20 FLAT B	25W	1847	1920	2012	2095	2178



Scan here for
installation
instructions

Order Guide - MIMIK 20

Order code example

M20-M-15W-3K-T2-AM-UNV-010V-EMPK

Series	Light Emission	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
Wall Mount M20 Standard M20F Flat (Note: flat housing only suitable for T2 distribution)	M One-Way B Two-Way	Standard Housing 15W 15 Watt (max with EMPK) 26W 26 Watt Standard (max) XX Specify wattage must be below max	70 CRI std. 27K 2700K 3K 3000K 35K 3500K 4K 4000K	Standard Housing (Note: Choose 1 for M and 2 for B) T2 Type 2 T3 Type 3 T4 Type 4	AM Aluminum Metallic IG Iron Gray IR Iron Rust WH Textured White	UNV 120-277V	010V 0-10V Dimming Driver ELV 120V Dimming Driver	EMPK Integral 15W emergency battery back up (not available with flat housing or with phc/occ) CWEMPK Remote cold weather emergency battery backup -20°C through 55°C FC Facade cover FRST Frosted glass EGR Egress double housing PHC-B Photocell button (not available with EMPK) OCC Occupancy sensor not available with EMPK REM Remote battery backup CON2 Double-gang J-box, adaptor plate and 1/2" knockouts CON4 Double-gang J-box, adaptor plate and 3/4" knockouts
Bollard 40" Standard Height M20BOL 40" bollard M20LBOL 40" line bollard M20BOLxx xx = bollard height (12" min to 40" max) M20LBOLxx xx = line bollard height (12" min to 40" max)		Flat Housing 14W 15 Watt (M max) 25W 26 Watt (B max) XX Specify wattage must be below max		Flat Housing Leave blank	BK Textured Black CC Custom Color			

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

40" Bollard option




40" Line Bollard option




OCC



Facade Cover

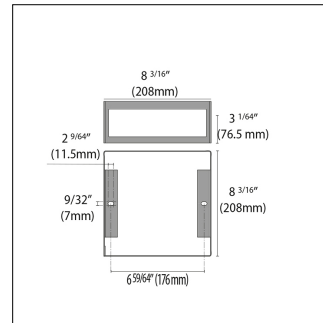


PHC-B



Egress Double Housing



CON2 (1/2")



CON4 (3/4")

