




- Area and site lighting series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - High-transmittance transparent optics.
 - The "Secure Light Distribution" system can bypass individual diodes in the event of a single LED failure to ensure continuous uniform light distribution.
 - IESNA Type II light distribution.
 - IESNA Type V light distribution.
 - Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - DarkSky approved in 3000K or below.
 - Integral surge protector can withstand up to 10 kV transient line surge.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for pole information.
 - Consult factory for wall bracket accessory, multi-head pole top mounting, and other custom options.
 - Ø3" and Ø4" post top adapters, and poles in 8' / 10' / 12' / 14' options available (ordered separately).
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured



SPILLO

Lumen Output	3K	4K
Spillo T2 7W	448	481
Spillo T2 33W	2088	2246
Spillo T2 65W	4177	4492
Spillo T5 7W	434	467
Spillo T5 33W	2026	2178
Spillo T5 65W	4052	4357



Scan here
for installation
instructions

Order Guide - Spillo



Order code example

SPILLO-T2-65-AM-3K-UNV-NA-4"

Series	Light Output	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
SPILLO Spillo	T2 Type II	7 7 Watt (min)	AM Aluminum Metallic	27K 2700K	UNV 120-277V	NA Non Dimming	4" 4" Pole top adapter
	T5 Type V	33 33 Watt	IG Iron Gray	3K 3000K		0-10V 0-10V Dimming Driver	3" 3" Pole top adapter
		65 65 Watt (max)	IR Iron Rust	35K 3500K		ELV 120V Line- Voltage Dimming Driver	BABAA Build America Buy America Act compliant
		XX Specify Wattage Must Be Below Max	BK Textured Black	4K 4000K			Poles available as an accessory (ordered separately) see below for details
			WH Textured White				
			CC Custom Color				

70 CRI STANDARD - OTHER OPTIONS AVAILABLE

Revision 11
04/25

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com


OPTIONAL ACCESSORIES (ordered separately)

POLES FOR SPILLO

When ordering, please specify quantity of fixtures per pole as well as installation location (city & state)

Order code example: 714 13 40 3

Material	Height (ft)	Pole Diameter (in)	Custom Options (blank is standard)	Finish (additional characters may follow for factory information)
714 Aluminum*	08 8' tall	30 Ø3.0" (adaptor required*)	DBx Direct Burial** (x = depth below grade, measured in feet)	1 Aluminum Metallic
715 Steel*	10 10' tall			2 Black
716 Wood*	12 12' tall	40 Ø4.0" (adaptor required*)	GFCI integrated GFCI outlet**	3 Iron Gray
	14 14' tall		BA Banner Arms** (contact factory for details)	4 Iron Rust
	20 20' tall			5 White
	40 40' tall		BH Bullhorn arms for double fixture	6 Custom Color (specify RAL#)
*Based on EPA and wind loads, pole may need to be tapered or require a tenon.		Custom heights available, contact factory for details. Some restrictions apply for wood poles.	**some options not available with wood poles - contact factory for details.	W1 Wood - Caramel - smooth
				W12 Wood - Vanilla - brushed
				For more, see below.

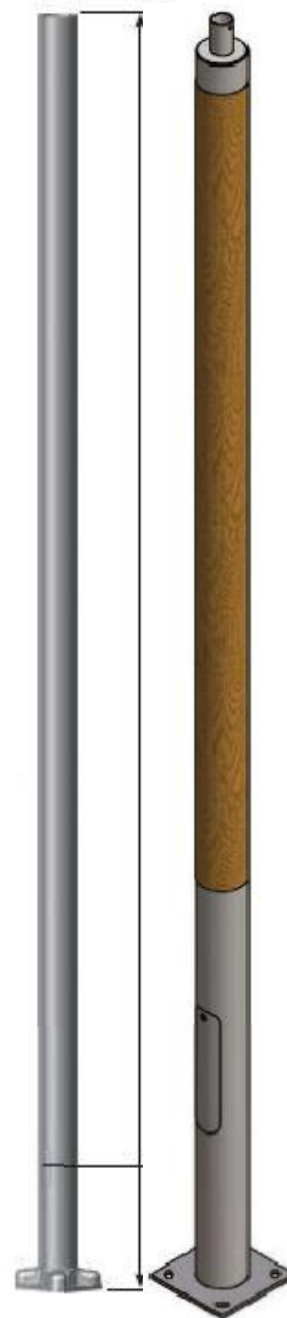

Item#: 090013

Ø3" pole adaptor



Item#: 090014

Ø4" pole adaptor



WOOD GRAIN FINISH OPTIONS:

W1	CARAMEL	W11	W6	SLATE	W16
W2	VANILLA	W12	W7	CINNAMON	W17
W3	COCOA	W13	W8	TOPAZ	W18
W4	SAFFRON	W14	W9	ONYX	W19
W5	NUTMEG	W15			

Base cover shape and bolt circle diameter (BCD) will vary based on pole size and vendor. Contact factory for details related to your project.