

QUASAR 10



Wall effect series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Wall effects light emission.

- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom beams options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

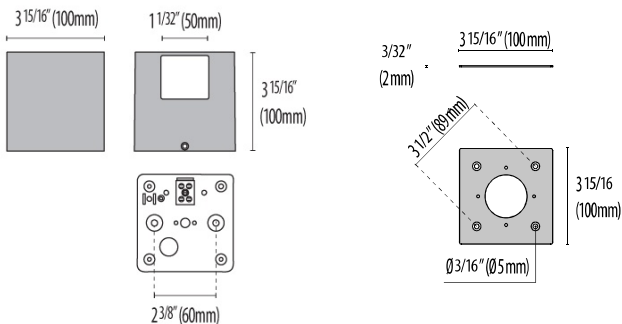

Lumen Output	27K	3K	35K	4K	5K
Quasar 10 1NB+1WB 5W	99	113	127	141	155
Quasar 10 1NB+1WB 10W	244	258	272	287	301
Quasar 10 1WB 3.5W	89	100	111	122	133
Quasar 10 1WB 5W	208	220	232	244	256
Quasar 10 2WB 5W	172	193	214	235	256
Quasar 10 2WB 10W	404	428	452	476	500
Quasar 10 4WB 10W	293	329	365	402	438

QUASAR
10

Scan here
for installation
instructions



Order Guide - Quasar 10



Order code example

Q10-2NB-5W-WH-6K-UNV-NA

Series	Light Emission	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
Q10 Quasar 10	1NB+1WB 1 - Narrow Beam + 1- Wide Beam	3.5W 3.5 watt (1 Window)	AM Aluminum Metallic	27K 2700K	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming (See table below) ELV 120V Line-Voltage Dimming (See table below) For more Options Contact Factory	BABAA Build America Buy America Act Compliant
	1NB 1- Narrow Beam	5W 5 watt (1 or 2 Windows)	IG Iron Gray	3K 3000K			
	2NB 2- Narrow Beam @180°	8W 8 Watt (3 Window)	IR Iron Rust	35K 3500K			
	1WB 1 - Wide Beam	10W 10 watt (2,3,or 4 Window max)	BK Textured Black	4K 4000K			
	2WB 2- Wide Beam @180°		WH Textured White	6K 6000K			
	3WB 3- Wide Beam		CC Custom Color	RED Static Red			
	3NB 3- Narrow beam			GRN Static Green			
	4WB 4- Wide Beam			BLU Static Blue			
	4NB 4- Narrow Beam			AMB Static Amber			
	XX Specify Beams 4 Window Max						

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 12
04/25

QUASAR 10

QUASAR 10 - DIMMING OPTIONS			
LOW OUTPUT	1L	3.5W	REMOTE 0-10V DRIVER REMOTE ELV DRIVER
	2L	5.5W	REMOTE 0-10V DRIVER REMOTE ELV DRIVER
	3L	8W	REMOTE 0-10V DRIVER REMOTE ELV DRIVER
	4L	10W	INTEGRAL 0-10V DRIVER INTEGRAL ELV DRIVER
HIGH OUTPUT	1L	5W	INTEGRAL 0-10V DRIVER REMOTE ELV DRIVER
	2L	10W	INTEGRAL 0-10V DRIVER INTEGRAL ELV DRIVER