

GUELL 1



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Copper-free precision die-cast aluminum housing, and adjustable steel mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- NEMA 5H x 5V light distribution (C/W)
- NEMA 7H x 5V light distribution (S/W).
- NEMA 6H x 5V light distribution (Type II).
- Input voltage: 120-277V (50 / 60 Hz), integral 0-10V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.

- Standard quick release latch(es) allow for tool-free access.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Louver, frosted glass, protective grid, wall support 19.69" / 39.37", single or double pole top support, and matching junction box plate accessories available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

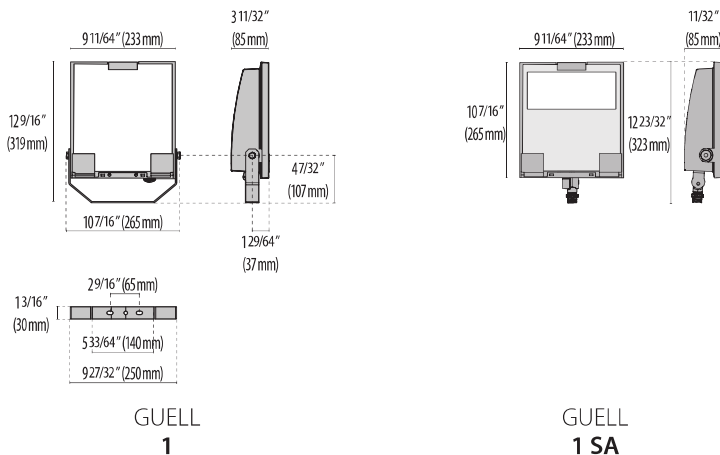

Lumen Output	3K	4K
Guell 1 C/W 45W	4165	4315
Guell 1 C/W 45W	4989	5439
Guell 1 S/W 45W	4441	4591
Guell 1 S/W 55W	5569	5719
Guell 1 T2 45W	4274	4424
Guell 1 T2 55W	5434	5584

Order Guide - Guell One



Order code example

GU1

GU1

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
YO Yoke	45 45 watt	C/IW nema 5Hx5V	AM Aluminum Metallic	2K 2000k	120 120 volts	NA Non Dimming	GRID Protective Glass Grid Cover
SA Swivel	55 55 watt (max)	S/W nema 7Hx5V	IG Iron Gray	27K 2700k	277 277 volts	0-10V 0-10V Dimming	WS20" Wall support 20"
	XX Specify Wattage Must be below max	A/W nema 6Hx5V	IR Iron Rust	3K 3000k		ELV ELV Dimming	WS40" Wall support 40"
			BK Textured Black	35K 3500k			SPT Single Pole top adaptor
			WH Textured White	4K 4000k			DPT Double pole top adaptor
			CC Custom Color	5K 5000k			Jbox Plate Jbox cover
				65K 6500k			PHC Button Style photocell
				RED Static Red			FRST Frosted glass lens
				GRN Static Green			LVR Louver Asymmetrical
				BLU Static Blue			LVR2 Louver Symmetrical
				RGBW RGBW Consult factory for control details			OCC1 On/Off Occupancy sensor
							OCC2 Hi/Lo Occupancy sensor
							PEN1 Single fixture pendant
							PEN2 Double fixture pendant
							CONSULT FACTORY for PENDANT DETAILS

OPTIONAL ACCESSORIES

DESCRIPTION

GUELL 1/S

Louvre GUELL 1 Symmetrical

GUELL 1/A

Louvre GUELL 1 Asymmetrical

GUELL 1

Soft glass GUELL 1

Protective grid GUELL 1






Wall support 500 mm/19.69" GUELL 1/2

Wall support 1000 mm/39.37" GUELL 1/2

Single pole top support GUELL 1

Double pole top support GUELL 1


Plate Cover JBox

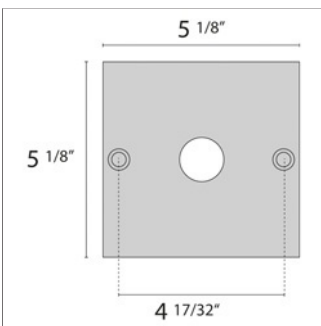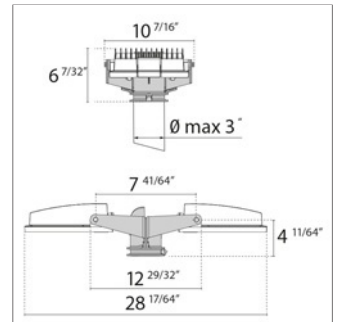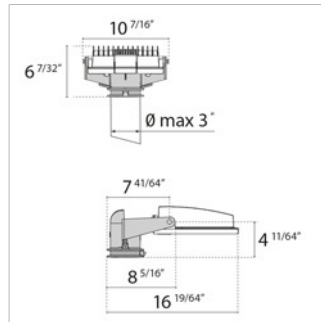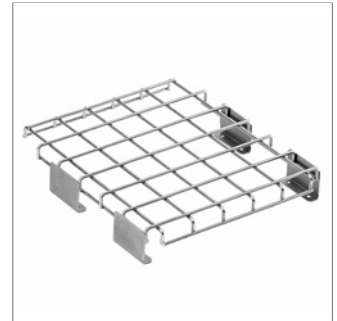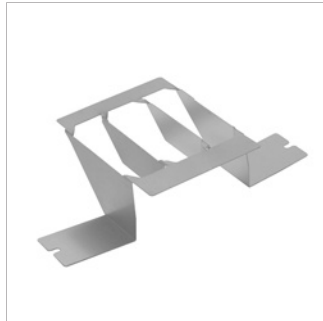

GUELL PENDANTS*

[GUELL 1](#) & [GUELL 2](#) – Single fixture pendant*

- Each fixture has its own stem/pendant (length to be specified by the customer).
- A Ø5" canopy cover that matches the fixture is provided to cover the jbox.
- *NOTE: Single pendants may not hang perfectly straight due to the offset center of gravity.

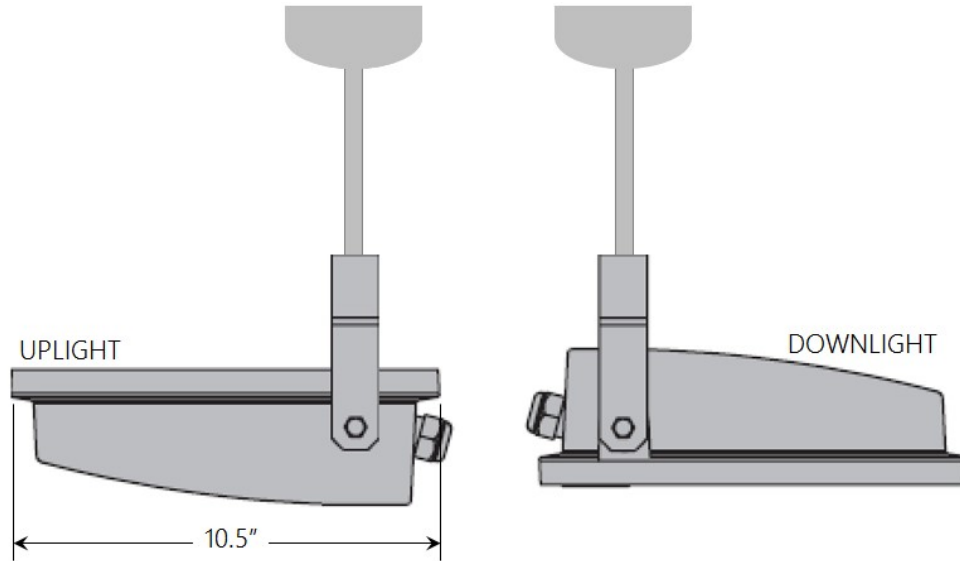

[GUELL 1](#) & [GUELL 2](#) – Double fixture pendant

- Each pair of fixtures has a stem/pendant (length to be specified by the customer).
- A Ø5" canopy cover that matches the fixture is provided to cover the jbox.

