

ALU SQUARE 1



Wall sconce series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 25° x 25° beam angle (C/M).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be remoted). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

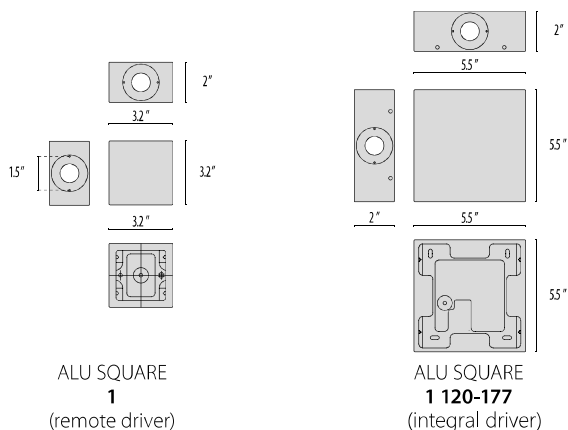

Lumen Output	27K	3K	35K	4K	6K
Alu 1 - 10°x45°	61	67	75	82	98
Alu 1 - 25°	63	68	74	79	91
Alu 1 - 40°	69	76	86	93	111
Alu 1 - 6°	80	85	92	98	111
Alu 1 - 120-277V-10°x45°	40	44	47	50	56
Alu 1 - 120-277V-25°	36	39	42	44	50
Alu 1 - 120-277V-40°	50	53	57	60	68
Alu 1 - 120-277V-6°	52	57	62	67	74

2.1W Max Wattage



Scan here
for installation
instructions

Order Guide - Alu Square 1



Order code example

AS1-RDR-AA-6-3K-UNV-NA

Series	Housing Style	Finish	Optics	Kelvin	Voltage	Controls	Accessories	
AS1 Alu Square 1	RDR Remote driver IDR Integral driver	AA Anodized Aluminum	6 6°	27K 2700K	UNV 120-277V Driver Input Voltage	NA Non Dimming	JBOX Jbox cover RDR Only Not suitable for IDR Housing	
		AB Anodized Black	25 25°	3K 3000K		0-10V 0-10V Dimming	RDR Remote Driver, please specify quantity of fixtures per driver (14-max)	
		Finishes Below Available MOQ30 pieces	40 40°	35K 3500K		ELV 120V Remote Line-Voltage Dimming Driver	REM Remote battery pack, requires multiple fixtures wired in series (4-min, 14-max)	
			ELL 10°x45°	4K 4000K				
			WB 60 degree Wide Beam	6K 6000K				
				RED Static Red				
				GRN Static Green			For more Options Contact Factory	
				BLU Static Blue				
				AMB 590nm Amber (turtle- friendly)				
					</			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE