

ALU SQUARE 2



Wall effect series. Fixtures consist of:

- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 25° x 25° beam angle (C/M).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be removed). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

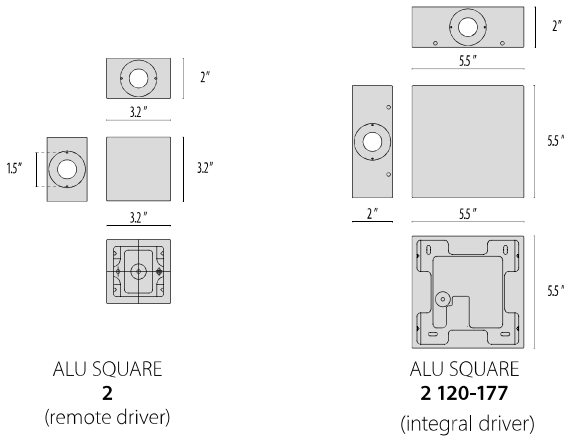

Lumen Output	27K	3K	35K	4K	6K
Alu 2 - 180°	64	71	79	86	101
Alu 2 - 120-277V- 180° - 10°x45°	82	88	94	100	112
Alu 2 - 120-277V- 180° - 40°	99	106	114	121	136
Alu 2 - 120-277V- 180° - 6°	106	114	122	130	147
Alu 2 - 120-277V- 180° - 6°+40°	102	110	117	125	141
Alu 2 - 180° - 40°	153	146	160	173	200
Alu 2 - 180° - 6°	177	200	224	247	295
Alu 2 - 180° - 6°+40°	165	175	189	204	234
Alu 2 - 180° - 10°x45°	121	132	144	155	178
Alu 2 - 120-277V- 180°	66	71	80	86	101
Alu 2 - 90°	67	72	81	88	105
Alu 2 - 90° - 6°	185	168	185	200	232
Alu 2 - 120-277V - 90°	64	72	80	88	105
Alu 2 - 120-277V- 90° - 6°	106	114	122	130	147

Order Guide - Alu Square 2



Order code example

AS2-180-RDR-6-AA-3K-NA

AS2-

Light Emission	Housing Style	Optics	Finish	Kelvin	Voltage	Controls	Accessories
180 2 LEDs 180° apart 90 2 LEDs 90° apart	RDR Remote driver IDR Integral driver	Pick Two 6 6 degrees 25 25 degrees 40 40 degrees ELL 10x45 degrees WB Wide Beam	AA Anodized Aluminum AB Anodized Black *Finishes Below Available MOQ30 pieces* AM Aluminum Metallic IG Iron Gray WH Textured White IR Iron Rust BK Textured Black CC Custom Color	27K 2700k 3K 3000k 35K 3500k 4K 4000k 6K 6000k RED Static Red GRN Static Green BLU Static Blue AMB Amber	120 120 volts 277 277 volts	NA Non Dimming 0-10V 0-10V Dimming ELV ELV Dimming	JBOX Jbox cover RDR Remote Driver (1:1) Other options available