

ALU SQUARE 4



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be removed). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

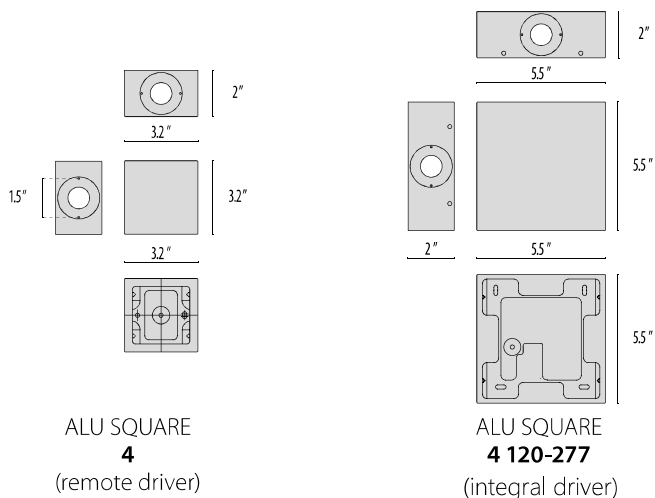

Lumen Output	27K	3K	35K	4K	6K
Alu 4	139	153	169	184	215
Alu 4 - 10°x45°	256	277	299	320	364
Alu 4 - 120-277V	139	153	169	184	215
Alu 4 - 120-277V- 10°x45°	164	176	188	200	224
Alu 4 - 120-277V-40°	196	211	226	241	271
Alu 4 - 120-277V	216	228	246	261	294
Alu 4 - 40°	291	316	341	366	416
Alu 4 - 6°	328	354	378	403	453

8.4W Max Wattage



Scan here
for installation
instructions

Revision 13
03/25

Order Guide - Alu Square 4



Order code example

AS4-IDR-AA-6-3K-120-NA

AS4-

Housing Style	Finish	Optics	Color Temperature	Voltage	Controls	Accessories
RDR Remote driver IDR Integral driver	AA Anodized Aluminum AB Anodized Black *Finishes Below Available MOQ30 pieces* IG Iron Gray WH Textured White IR Iron Rust CC Custom Color	6 6 degrees 25 25 degrees 40 40 degrees ELL 10x45 degrees WB 60 degree Wide Beam	27K 2700k 3K 3000k 35K 3500k 4K 4000k 6K 6000k RED Static Red GRN Static Green BLU Static Blue AMB 590nm Amber (turtle-friendly)	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming ELV 120V Remote Line-Voltage Dimming Driver For more Options Contact Factory	JBOX Jbox cover RDR Only Not suitable for IDR Housing RDR Remote Driver (1:1) Other options available REM Remote Emergency Battery Back-Up BABAA Build America Buy America Act compliant

80 CRI STANDARD - OTHER OPTIONS AVAILABLE