

ALU SQUARE 4



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be removed). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- 5-year warranty.
- Marine Grade finish.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

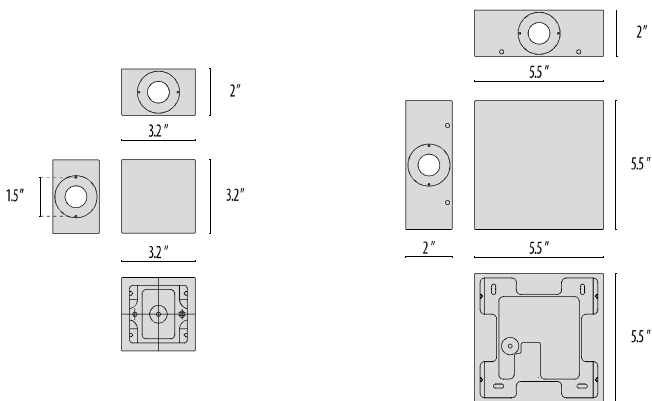

ALU SQUARE
4
(remote driver)

ALU SQUARE
4 120-277
(integral driver)

Lumen Output	27K	3K	35K	4K	6K
Alu 4	139	153	169	184	215
Alu 4 - 10°x45°	256	277	299	320	364
Alu 4 - 120-277V	139	153	169	184	215
Alu 4 - 120-277V- 10°x45°	164	176	188	200	224
Alu 4 - 120-277V-40°	196	211	226	241	271
Alu 4 - 120-277V	216	228	246	261	294
Alu 4 - 40°	291	316	341	366	416
Alu 4 - 6°	328	354	378	403	453

8.4W Max Wattage



Scan here
for installation
instructions

Order Guide - Alu Square 4



Order code example

AS4-IDR-AA-6-3K-120-NA

AS4-

Housing Style	Finish	Optics	Color Temperature	Voltage	Controls	Accessories
RDR Remote driver	AA Anodized Aluminum	6 6 degrees	27K 2700k	UNV 120-277V	NA Non Dimming	JBOX Jbox cover RDR Only Not suitable for IDR Housing
IDR Integral driver	AB Anodized Black	25 25 degrees	3K 3000k		0-10V 0-10V Dimming	RDR Remote Driver (1:1) Other options available
	Finishes Below Available MOQ30 pieces	40 40 degrees	35K 3500k		ELV 120V Remote Line-Voltage Dimming Driver	REM Remote Emergency Battery Back-Up
	ELL 10x45 degrees		4K 4000k		For more Options Contact Factory	BABAA Build America Buy America Act compliant (not available for all options)
	WB 60 degree Wide Beam		6K 6000k			
	IG Iron Gray		RED Static Red			
	WH Textured White		GRN Static Green			
	IR Iron Rust		BLU Static Blue			
	CC Custom Color		AMB 590nm Amber (turtle-friendly)			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 14
06/25