

ALU SQUARE 4



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Clear UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Wall effects light emission.
- 6° x 6° beam angle (C/I).
- 40° x 40° beam angle (C/M).
- 10° x 45° beam angle (ELL).
- Input voltage is 120-277 V (50/60 Hz), integral driver for "120-277" models only.

- Matching junction box plate optional accessory available (ordered separately).
- For models not in the "120-277" category, a 700 mA constant current driver is available as an accessory or by others (to be removed). Consult factory for more information.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

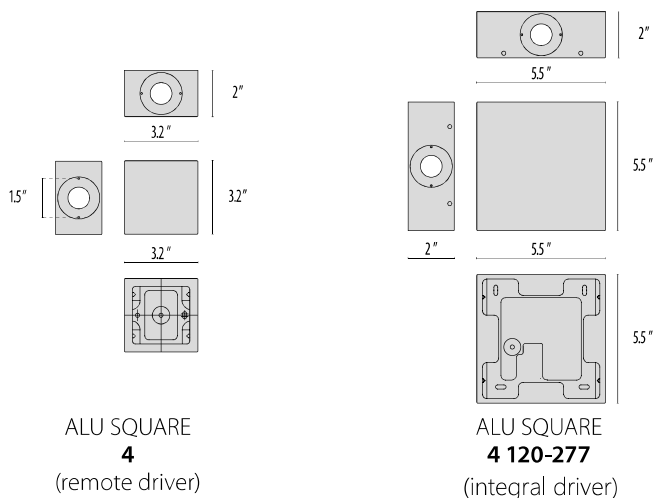

Lumen Output	27K	3K	35K	4K	6K
Alu 4	139	153	169	184	215
Alu 4 - 10°x45°	256	277	299	320	364
Alu 4 - 120-277V	139	153	169	184	215
Alu 4 - 120-277V- 10°x45°	164	176	188	200	224
Alu 4 - 120-277V-40°	196	211	226	241	271
Alu 4 - 120-277V	216	228	246	261	294
Alu 4 - 40°	291	316	341	366	416
Alu 4 - 6°	328	354	378	403	453

8.4W Max Wattage



Scan here
for installation
instructions

Revision 11
09/24

Order Guide - Alu Square 4



Order code example

AS4-IDR-AA-6-3K-120-NA

AS4-

Housing Style	Finish	Optics	Color Temperature	Voltage	Controls	Accessories
RDR Remote driver	AA Anodized Aluminum	6 6 degrees	27K 2700k	UNV 120-277V	NA Non Dimming	JBOX Jbox cover RDR Only Not suitable for IDR Housing
IDR Integral driver	AB Anodized Black	25 25 degrees	3K 3000k		0-10V 0-10V Dimming	
	40 40 degrees		35K 3500k		ELV ELV Dimming	RDR Remote Driver (1:1) Other options available
	Finishes Below Available MOQ30 pieces	ELL 10x45 degrees	4K 4000k			
	AM Aluminum Metallic	WB 60 degree Wide Beam	6K 6000k			REM Remote Emergency Battery Back-Up
	IG Iron Gray		RED Static Red			
	WH Textured White		GRN Static Green			BABAA Build America Buy America Act compliant
	IR Iron Rust		BLU Static Blue			
	BK Textured Black		AMB 590nm Amber (turtle-friendly)			
	CC Custom Color					

80 CRI STANDARD - OTHER OPTIONS AVAILABLE