
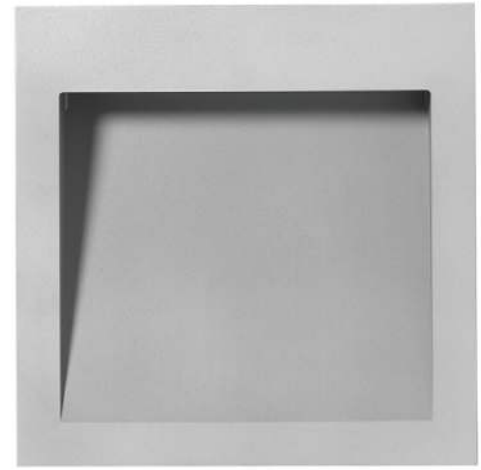


# ALU TECH

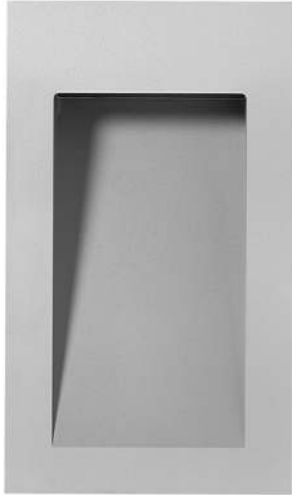

Recessed wall step light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical

- connection included.
- Stainless steel grounding tether included.
- Consult factory for dimming options, custom finishes, and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Stainless steel recessed rough-in kit can be ordered separately.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.




## FINISHES


- GR-EV1 / Anodized aluminum / Matt
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured



ALU TECH  
RV

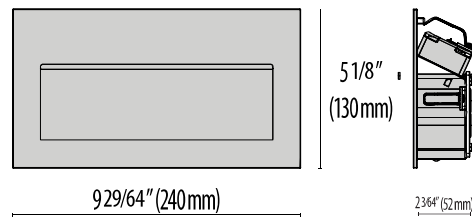

ALU TECH  
RO

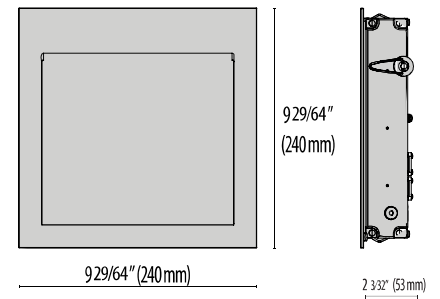

ALU TECH  
SQ

Wattage	
RV	6W
RO	11W
SQ	11W

Lumen Output	27K	3K	35K	4K
RV	202	207	212	212
RO	383	396	408	421
SQ	428	441	454	467



Scan here  
for installation  
instructions

# Order Guide - Alu Tech



Order code example

**AT-RV-AA-4K-120V-NA-18"Whip**


AT-

Housing Style	Finish	Color Temperature	Voltage	Controls	Options
<b>RV</b> Vertical  <b>RO</b> Horizontal  <b>SQ</b> Square	<b>AA</b> Anodized Aluminum  <b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>WH</b> Textured White  <b>CC</b> Custom Color	<b>27K</b> 2700k  <b>3K</b> 3000k  <b>35K</b> 3500k  <b>4K</b> 4000k  <b>AMB</b> 590nm Amber (turtle friendly)	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming  <b>0-10V</b> 0-10V Dimming  <b>ELV</b> 120V Line-Voltage Dimming Driver  For more Options Contact Factory  Integral Dimming not available with all versions / wattages	<b>XX" Whip</b> Cable Extention (6" Standard)  <b>BABAA</b> Build America Buy America Act compliant (not available for all options)


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

## INCLUDED ACCESSORIES


DESCRIPTION	FINISH	PART NUMBER
<b>ALU TECH</b>		
Rough in - ALU TECH RV		3101407
Rough in - ALU TECH RO		3101409
Rough in - ALU TECH SQ		3101408



310407  
Recessed Alu Tech RV



310409  
Recessed Alu Tech RO



310408  
Recessed Alu Tech Square