
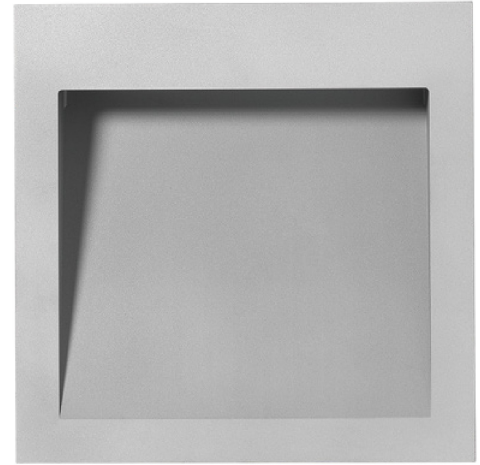


ALU TECH

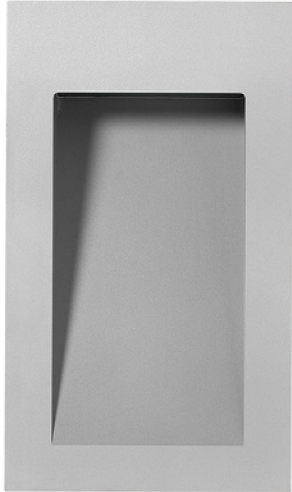

Recessed wall step light series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- IESNA Type III light distribution.
- Input voltage: 120-277V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical


- connection included.
- Stainless steel grounding tether included.
- Consult factory for dimming options, custom finishes, and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Stainless steel recessed rough-in kit to be ordered separately.
- 5-year warranty.
- Product meets Buy American Act requirements within ARRA.
- Marine Grade finish.
- Suitable for Natatorium applications.




IK 05
0.7 J

FINISHES


- GR-EV1 / Anodized aluminum / Matt
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured



ALU TECH
RV

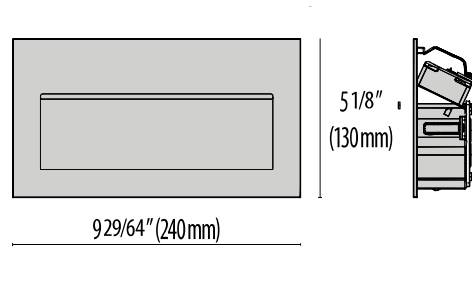

ALU TECH
RO

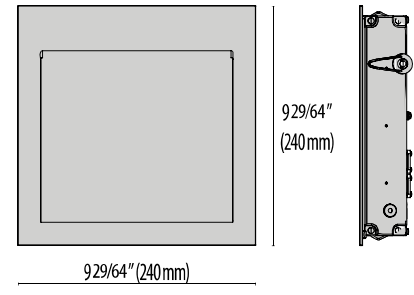

ALU TECH
SQ

Wattage	
RV	6W
RO	11W
SQ	11W

Lumen Output	27K	3K	35K	4K
RV	202	207	212	212
RO	383	396	408	421
SQ	428	441	454	467

Order Guide - Alu Tech



Order code example

AT-RV-AA-4K-120V-ELV-18"Whip

AT-

--	--	--	--	--	--

Housing Style	Finish	Color Temperature	Voltage	Controls	Options
RV Vertical	AA Anodized Aluminum	27K 2700k	120 120 volts	NA Non Dimming	XX" Whip Cable Extention (6" Standard)
RO Horizontal	AM Aluminum Metallic	3K 3000k	277 277 volts	0-10V 0-10V Dimming	REM Remote EMPK
SQ Square	IG Iron Gray	35K 3500k		ELV ELV Dimming	
	IR Iron Rust	4K 4000k			
	BK Textured Black				
	WH Textured White				
	CC Custom Color				