

# INSERT+2



Recessed wall step light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and ring/faceplate.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Pre-wired factory sealed cable for external electrical connection included.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Stainless steel recessed rough-in kit to be ordered separately.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

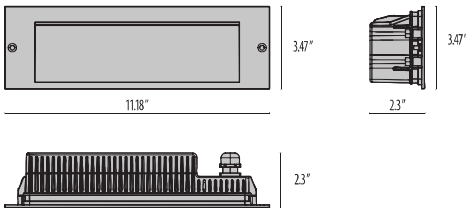

INSERT+  
2

Lumen Output	27K	3K	35K	4K	5K	6K
Insert+2	481	503	528	553	578	603

# Order Guide - Insert+2




Order code example

IN2-11-AM-3K-120-NA

IN2-					
Wattage	Finish	Kelvin	Voltage	Controls	Accessories
<b>8</b> 8 watt	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>120</b> 120 volts	<b>NA</b> Non Dimming	<b>SWR</b> Shallow Wall Rough in
<b>11</b> 11 watt (max)	<b>IG</b> Iron Gray	<b>3K</b> 3000k	<b>277</b> 277 volts	<b>0-10V</b> 0-10V Dimming	<b>ADP</b> Retrofit adaptor plate
<b>XX</b> Specify Wattage Must be below max	<b>IR</b> Iron Rust	<b>35K</b> 3500k		<b>ELV</b> ELV Dimming	
	<b>BK</b> Textured Black	<b>4K</b> 4000k			
	<b>WH</b> Textured White	<b>5K</b> 5000k			
	<b>CC</b> Custom Color	<b>RED</b> Static Red			
		<b>BLU</b> Static Blue			
		<b>GRN</b> Static Green			
		<b>RGBW</b> RGBW Consult factory for control details			

## MANDATORY ACCESSORIES

### INSERT+



310486  
ROUGH-IN