

INSERT+2




- Recessed wall steplight series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and ring/faceplate.
 - Frosted, flat, tempered silk-screened soda-lime glass diffuser.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - IESNA Type III light distribution.
 - Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Pre-wired factory sealed cable for external electrical connection included.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Stainless steel recessed rough-in kit to be ordered separately.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

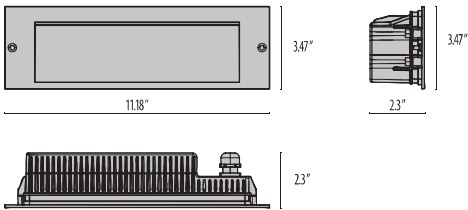

Lumen Output	27K	3K	35K	4K	5K	6K
Insert+2	481	503	528	553	578	603

11W Max Wattage

INSERT+
2

Scan here
for installation
instructions



Order Guide - Insert+2



Order code example


IN+2

Wattage	Finish	Kelvin	Voltage	Controls	Accessories
8 8 watt	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	ADP Retrofit adaptor plate
11 11 watt (max)	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	TP Tamper Proof hardware
XX Specify Wattage Must be below max	IR Iron Rust	35K 3500k		ELV 120V Line-Voltage Dimming Driver	BABAA Build America Buy America Act compliant (not available for all options)
	BK Textured Black	4K 4000k			
	WH Textured White	5K 5000k			
	CC Custom Color	AMB Static Amber Turtle Friendly (590nm)			
		RED Static Red			
		BLU Static Blue			
		GRN Static Green			
		RGBW* RGBW See below for control details			


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

ACCESSORIES

INSERT+



Standard Rough-In
Included with Fixture
310486
ROUGH-IN



Retrofit Adapter
Plate
ADP
Goof Ring
Contact Factory for
Custom Adapter Plates/
Goof Rings

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP