

MAGICCLICK MAXI



Ceiling and wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and ring/faceplate.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- The ring/faceplate is integral with the diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Tilttable LED board mounting bracket allows for quick and easy installation.
- 100% uniform diffused light emission.
- 5-year warranty on components.
- 10-year warranty on glass.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Standard hinge-style housing allows for a simplified installation.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Polycarbonate lens option available. Consult factory for more information.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **BK-81** / Black / Textured
- **RB-10** / Iron rust / Textured

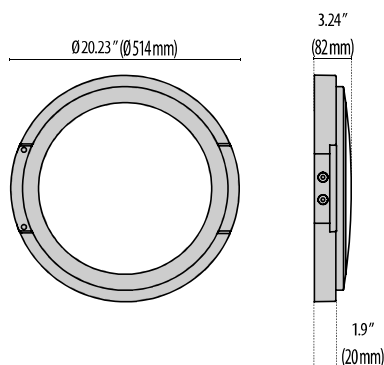

MAGICCLICK
MAXI

Scan Here for
Installation Instructions



Lumen Output	27K	3K	35K	4K	5K
Magiclick Maxi 40W	1429	1474	1519	1564	1609
Magiclick Maxi 63W	2602	2684	2766	2848	2930
Magiclick Maxi EMPK	1429	1474	1519	1564	1609

Order Guide - Magiclick Maxi



Order code example

MCM-63-AM-3K-120-NA-PC

MCM-

Wattage	Finish	Kelvin	Voltage	Controls	Options
40 40 watt 63 63 watt (max) XX Specify wattage must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	3K 3000k 35K 3500k 4K 4000k	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line-Voltage Dimming Driver	PC Polycarb Lens EMPK 40W Emergency Battery back-up TP Tamper Proof bolts REM 63W Remote mounted emergency battery back-up SC Side conduit entry 1/2" or 1/4" *FIELD MOD* To be done in Field BABAA Build America Buy America Act compliant (not available for all options)

80 CRI STANDARD - OTHER OPTIONS AVAILABLE