


MAGICCLICK ROUND

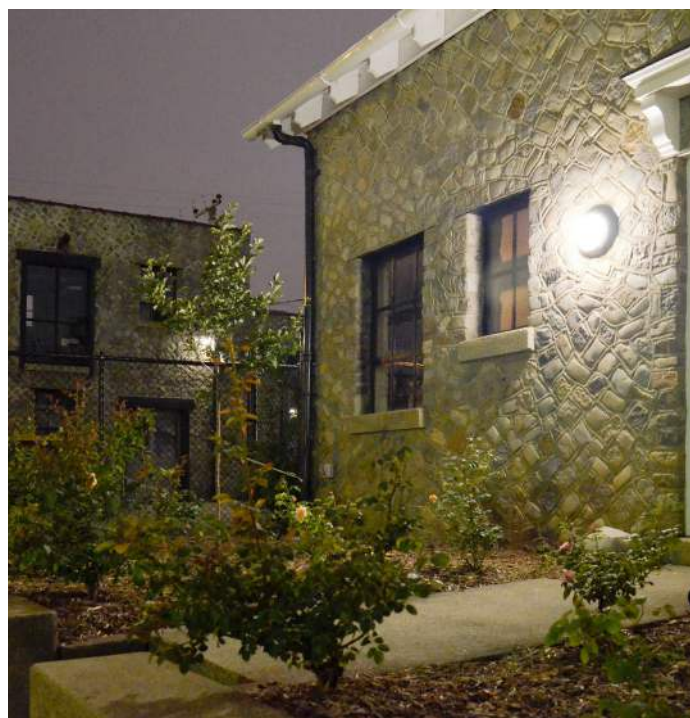

Ceiling and wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- The ring/faceplate is integral with the diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Tilttable LED board mounting bracket allows for quick and easy installation.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Standard hinge-style housing allows for a simplified installation.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Polycarbonate lens option available (ROUND 25). Consult factory for more information.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

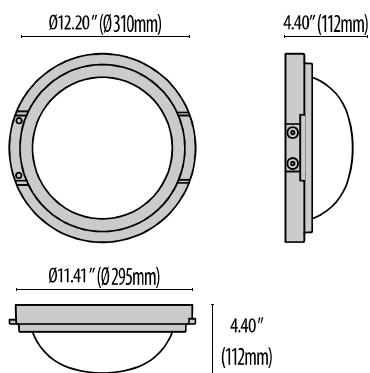

MAGICCLICK
ROUND 25

Scan Here for
Installation Instructions



LUMEN OUTPUT	27K	3K	35K	4K	5K
Magiclick Round 22W	875	935	995	1055	1115
Magiclick Round 26W	1237	1255	1272	1290	1307

Order Guide - Magiclick Round



Order code example

MCR-26-AM-3K-120-NA-PC



Glass Lens
(standard)



Flat Polycarb Lens
26W only



Polycarb Lens

MCR-

Wattage	Finish	Kelvin	Voltage	Controls	Options
22 22 watt 26 26 watt (max) XX Specify wattage must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	27K 2700K 3K 3000k 35K 3500k 4K 4000k 5K 5000K RED Static Red BLU Static Blue GRN Static Green RGBW* RGBW <small>*See Below for control details</small>	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line-Voltage Dimming Driver	FPC Flat Polycarb Lens *26W Only* PC Polycarb Lens REM Remote Mounted Emergency Battery Back up EMPK Intergal Emergency battery back up TP Tamper proof hardware BABAA Build America Buy America Act compliant (not available for all options)

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 13
06/25

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP