

SPILLO MINI




- Pathway bollard series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Copper-free aluminum extruded post.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - High-transmittance transparent optics.
 - The "Secure Light Distribution" system can bypass individual diodes in the event of a single LED failure to ensure continuous uniform light distribution.
 - IESNA Type V light distribution.
 - DarkSky approved in 3000K or below.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for custom post height options.
 - Anchor bolts available for bollards (ordered separately).
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.
 - Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

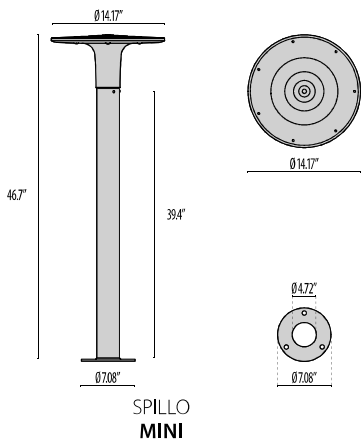

Scan here
for installation
instructions



Lumen Output	27K	3K	4K
Spillo Mini	1326	1378	1482

22W Max Wattage

Revision 11
06/25

Order Guide - Spillo Mini



Order code example

SPMINI-47-22-AM-3K-UNV-NA

Series	Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories	
SPMINI Spillo Mini	47 47 inch (standard)	11 11 Watt	AM Aluminum Metallic	27K 2700K	UNV 120-277V	NA Non Dimming	GFCI 20 amp outlet BABAA Build America Buy America Act compliant (not available for all options) See image below	
	36 36 inch (min)	22 22 Watt (max)	IG Iron Gray	3K 3000K				0-10V 0-10V Dimming Driver
	80 80 inch (max)	XX Specify Wattage Must Be Below Max	IR Iron Rust	35K 3500K				
	XX Specify height must be within range		BK Textured Black	4K 4000K		ELV 120V Line- Voltage Dimming Driver		
			WH Textured White	RGBW* See below for details				
			CC Custom Color					

70 CRI STANDARD - OTHER OPTIONS AVAILABLE

-GFCI



Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 11
06/25

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

WIFI Controls



3104163
RGBW WIFI controller 4 channel
(0.35A each CH)



31041630
RGBW WIFI controller WP 4 channel
(0.35A each CH)

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)