



STEEL ROUND MAXI

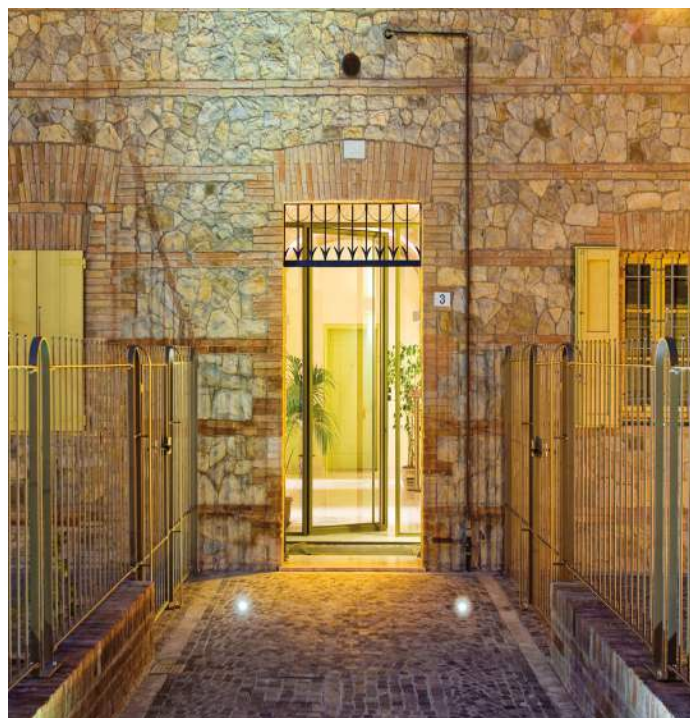

In-ground series. Fixtures consist of:



- Copper-free die-cast aluminum housing and die-cast corrosion-resistant AISI 316 stainless steel trim.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- Standard aimable optic system ($\pm 7^\circ$).
- 8" x 8" beam angle (C/L).
- 10" x 45" beam angle (ELL).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired cable connects luminaire with WATER-STOP connection system, suitable for through wiring. Included cable glands accept cables from Ø0.35" up to Ø0.63".
- COMPACT reduced depth rough-in comes with formed steel bars to provide support in drive-over applications and is designed to encourage water drainage.
- Drive over rated <6 MPH, 5511 lbs weight
- Static load up to 4409 lbs

- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Standard easy-to-adjust mounting system that enables the fixture to be easily aimed even after installation.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for frosted or non-slip glass options.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor inground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

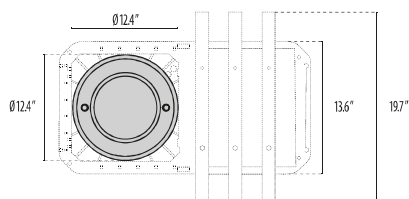

Lumen Output	3K	4K	5K	6K
Steel Round Maxi ELL	1215	1417	1619	2025
Steel Round Maxi 8°	1215	1417	1619	2025

15.8W Max Wattage



**Scan here
for installation
instructions**

Revision 10
04/25

Order Guide - Steel Round Maxi



Order code example


SRMAX-15.8-20-SS-27K-UNV-NA-NS

Series	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
SRMAX Steel Round Maxi	15.8 15.8 watt (max) XX Specify wattage must be under max	8 8° Beam	BSS Stainless Steel Brushed	27K 2700k	UNV 120-277V	NA Non Dimming	NS Non-Slip Glass
		15 15° Beam	SS Stainless Steel Polished	3K 3000k		0-10V 0-10V Dimming Driver	LVR Hex Louver
		20 20° Beam	AM Aluminum Metallic	35K 3500k		ELV 120V Line-Voltage Dimming Driver	FRST Frosted Glass Lens
		30 30° Beam	IG Iron Gray	4K 4000k			TP Tamper Proof hardware
		35 35° Beam	IR Iron Rust	5K 5000K			
		45 45° Beam	BK Textured Black	65K 6500K			
		55 55° Beam	WH Textured White	RED Red			
		75 75° Beam	CC Custom Color	BLU Blue			
		80 80° Beam		GRN Green			
		ELL 10°x45°		AMB Amber			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
STEEL ROUND MAXI		
Recessed Rough-in kit		310252



Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 10
04/25