

STEEL ROUND MAXI RAD



In-ground step mark series. Fixtures consist of:


- Copper-free die-cast aluminum housing and die-cast corrosion-resistant AISI 316 stainless steel dome (RAD versions).
- High transmittance, internally frosted, soda-lime pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes (RAD versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Ground-level side-emission light distribution (RAD 90°, 180°, and 360°).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired cable connects luminaire with WATER-STOP connection system, suitable for through wiring. Included cable glands accept cables from Ø0.35" up to Ø0.63".
- Drive over rated <6 MPH, 6613 lbs weight Static load up to 4409 lbs

- COMPACT reduced depth rough-in comes with formed steel bars to provide support in drive-over applications and is designed to encourage water drainage.
- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Standard easy-to-adjust mounting system that enables the fixture to be easily aimed even after installation.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor inground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

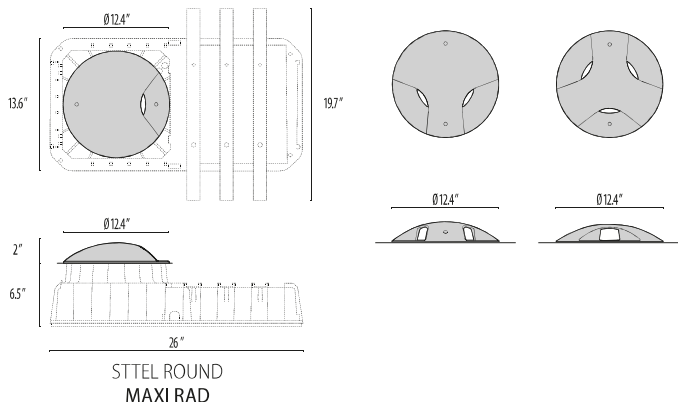

Lumen Output	3K	4K	6K
Steel Round Maxi RAD 90°	146	172	199
Steel Round Maxi RAD 180°	306	344	382
Steel Round Maxi Rad 360°	452	508	564

6W/12W/18W Max Wattage

Scan here
for installation
instructions



Revision 10
06/25

Order Guide - Steel Round Maxi RAD



Order code example


SRMAXR-90-6-SS-3K-UNV-NA

Series	Light Emission	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
SRMAXR Steel Round Maxi Rad	90 1 Beam	6 6 watt (90 max)	SS Stainless Steel Polished	3K 3000K	UNV 120-277V	NA Non Dimming	TP Tamper Proof hardware
	180 2 Beams	12 12 watt (180 max)	AM Aluminum Metallic	4K 4000K			
	360 3 Beams	18 18 watt (360 max)	IG Iron Gray	6K 6000K			
	See Chart Below	XX Specify wattage must be below max	IR Iron Rust				
			BK Textured Black				
			WH Textured White			ELV 120V Line- Voltage Dimming Driver	BABAA Build America Buy America Act compliant (not available for all options)
			CC Custom Color				

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
STEEL ROUND MAXI RAD		
Recessed Rough-in kit		310252



Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 10
06/25

STEEL ROUND MAXI RAD



90°



180°



360°