


- Pathway bollard series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Copper-free aluminum extruded post.
 - Frosted, flat, tempered silk-screened soda-lime glass diffuser.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
 - IESNA Type V light distribution.
 - DarkSky approved in 3000K or below.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for custom post height options.
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

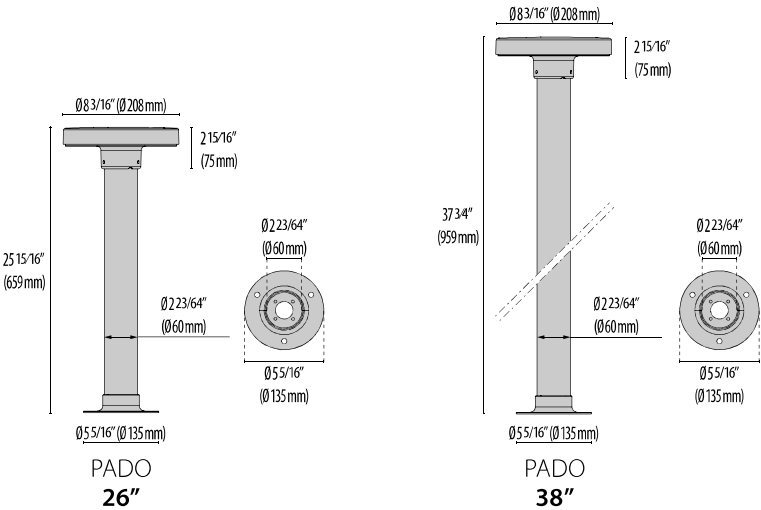

Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K
Pado 26"	1040	1079	1118	1157	1196
Pado 38"	1040	1079	1118	1157	1196

Order Guide - Pado


Order code example

PADO-42-20-IR-4K-UNV-NA-GFCI



Series	Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories	
PADO Pado	26 26 inch*	8 8 watt	AM Aluminum Metallic*	22K 2200K	UNV 120-277V	NA Non Dimming	GFCI 20 amp outlet	
	38 38 inch*	20 20 watt* (max)	IG Iron Gray*	27K 2700K		0-10V 0-10V Dimming Driver*	WALL Wall Mounted Option	
	42 42 inch		IR Iron Rust*	3K 3000K*				
			BK Textured Black*	35K 3500K				
			WH Textured White*	4K 4000K*				
				CC Custom Color				5K 5000K
								65K 6500K
			RED Static Red					
			BLU Static Blue					
			GRN Static Green					
			AMB Static Turtle Friendly Amber					

GFCI

Wall
Mounted Option

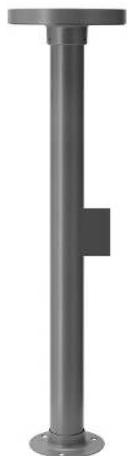

Fixture shown in
Iron Gray with GFCI
mounted at 18" above
the mounting surface.
Customer can specify a
specific height if needed.

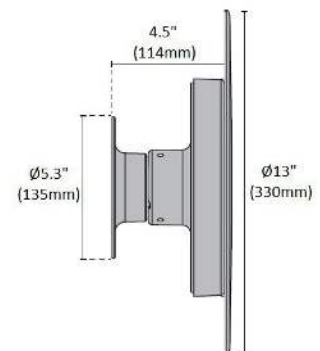

Performance in Lighting reserves the right to make all necessary changes without prior notice.