



Pathway bollard series. Fixtures consist of:

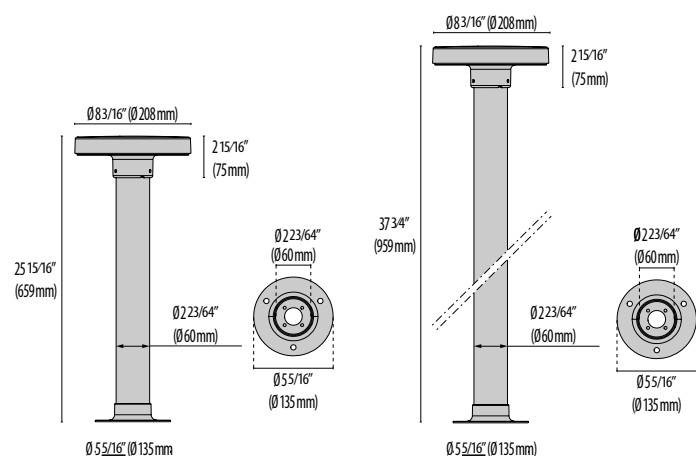
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and top cap.
- Copper-free aluminum extruded post.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- IESNA Type V light distribution.
- DarkSky approved in 3000K or below.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Consult factory for custom post height options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured



PADO 26"

PADO 38"

Lumen Output	27K	3K	35K	4K	5K
Pado 26"	1040	1079	1118	1157	1196
Pado 38"	1040	1079	1118	1157	1196

20W Max Wattage



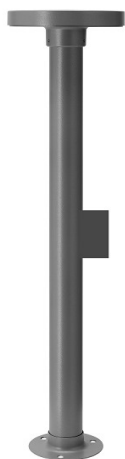
Scan here
for installation
instructions

Order code example


PADO-26-8W-3K-AM-UNV-010V-GFCI

Series	Bollard Height	Wattage	CCT	Finish	Voltage	Dimming	Options/ Accessories
PADO Pado	26 26 inch*	8W 8 Watt	80 CRI std. 22K 2200K 27K 2700k 3K 3000k* 35K 3500k 4K 4000k* 5K 5000k 65K 6500k RED Static Red BLU Static Blue GRN Static Green AMB Static Turtle Friendly Amber	AM Aluminum Metallic* IG Iron Gray* IR Iron Rust* BK Textured Black* WH Textured White* CC Custom Color	UNV 120-277V	010V 0-10V Dimming Driver* ELV 120V Line- Voltage Dimming Driver	GFCI 20 amp outlet Wall Wall mounted option FP Faceplate 13" (For wall mount only)

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

GFCI

Fixture shown in
Iron Gray with GFCI
mounted at 18" above
the mounting surface.
Customer can specify a
specific height if needed.

Wall Mount**Wall Mount
w/ Faceplate**