




- Pathway bollard series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Copper-free aluminum extruded post.
 - Frosted, flat, tempered silk-screened soda-lime glass diffuser.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
 - IESNA Type V light distribution.
 - DarkSky approved in 3000K or below.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for custom post height options.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.
 - Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

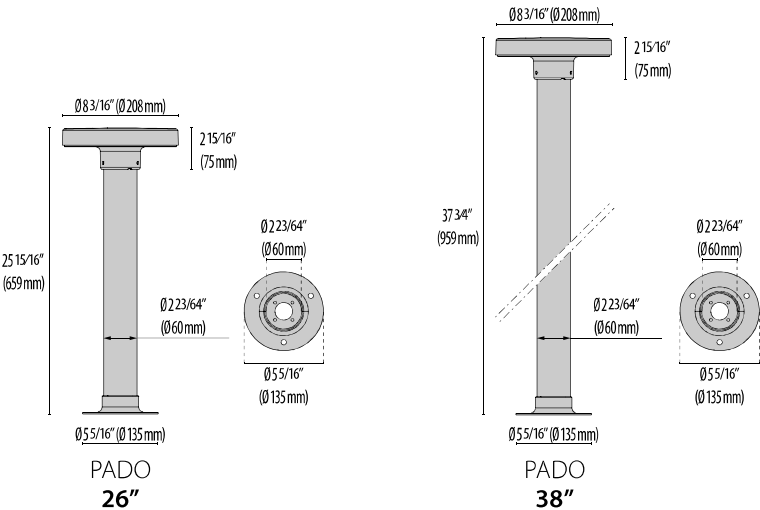

Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K
Pado 26"	1040	1079	1118	1157	1196
Pado 38"	1040	1079	1118	1157	1196

* indicates product options with possible reduced lead times

80 CRI STANDARD - OTHER OPTIONS AVAILABLE



Order Guide - Pado

Order code example

PADO-42-20-IR-4K-UNV-NA-GFCI


Series	Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
PADO Pado	26 26 inch*	8 8 watt	AM Aluminum Metallic*	22K 2200K	UNV 120-277V	NA Non Dimming	GFCI 20 amp outlet
	38 38 inch*	20 20 watt* (max)	IG Iron Gray*	27K 2700K			
	42 42 inch		IR Iron Rust*	3K 3000K*			
			BK Textured Black*	35K 3500K			
			WH Textured White*	4K 4000K*		0-10V 0-10V Dimming Driver*	WALL Wall Mounted Option
				5K 5000K			
				65K 6500K			
				RED Static Red			
				BLU Static Blue			
				GRN Static Green			
				AMB Static Turtle Friendly Amber			
						ELV 120V Line- Voltage Dimming Driver	BABAA Build America Buy America Act Compliant (not available for all options)

GFCI

Wall
Mounted Option



Fixture shown in
Iron Gray with GFCI
mounted at 18" above
the mounting surface.
Customer can specify a
specific height if needed.

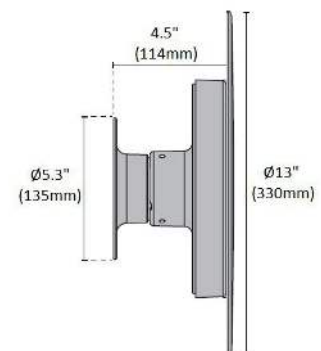

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 12
06/25