


PADO

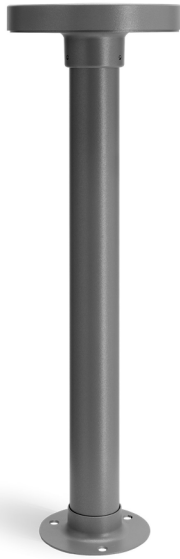

Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and top cap.
- Copper-free aluminum extruded post.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- IESNA Type V light distribution.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Consult factory for custom post height options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

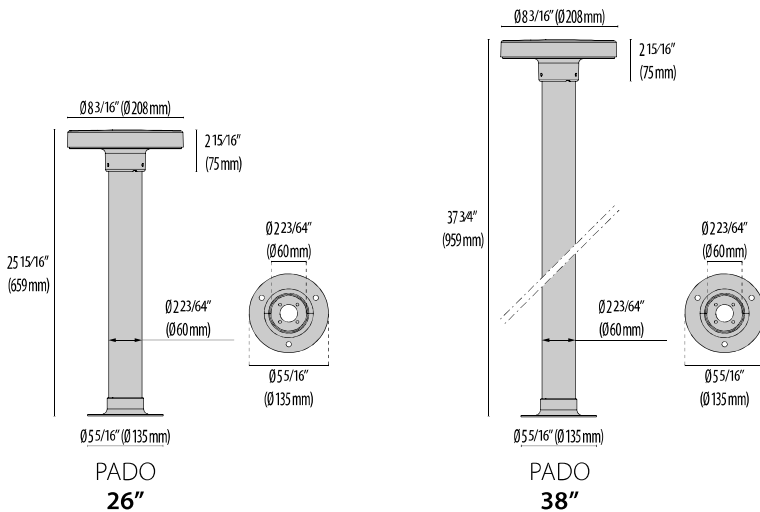

Lumen Output	27K	3K	35K	4K	5K
Pado 26"	1040	1079	1118	1157	1196
Pado 38"	1040	1079	1118	1157	1196

Order Guide - Pado



Order code example

PADO-42-20-IR-4K-120-NA-GFCI

PADO-

Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
26 26 inch	8 8 watt	AM Aluminum Metallic	27K 2700k	120 120 volts	NA Non Dimming	GFCI 20 amp outlet
38 38 inch	20 20 watt (max)	IG Iron Gray	3K 3000k	277 277 volts	0-10V 0-10V Dimming	
42 42 inch		IR Iron Rust	35K 3500k		ELV ELV Dimming	
		BK Textured Black	4K 4000k			
	WH Textured White	5K 5000k				
	CC Custom Color	65K 6500k				
		RED Static Red				
		BLU Static Blue				
		GRN Static Green				