


BLIZ SQUARE 40




- Ceiling- and wall- mount series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free die-cast aluminum housing, ring, and faceplates.
 - High transmittance, internally coated, pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
 - 100% uniform diffused light emission.
 - Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Optional, integral, high-frequency motion-sensor

- operating at a frequency of 5.8 GHz +/- 75 MHz (HF versions).
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.

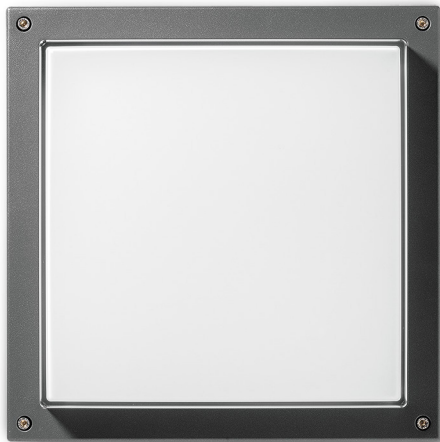

FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

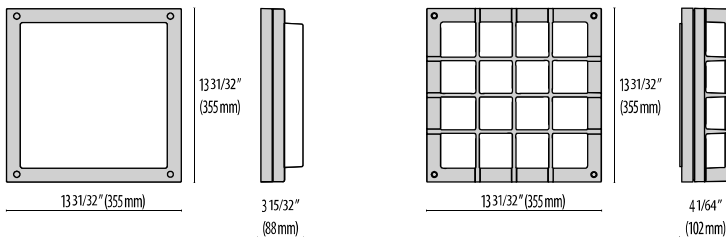

BLIZ SQUARE
40

BLIZ ROUND
40 GRILL

Lumen Output	27K	3K	35K	4K	6K
Bliz Square 40	2485	2495	2505	2515	2525
Bliz Square 40 EMPK	2313	2322	2331	2340	2349
Bliz Square 40 HF	2485	2495	2505	2515	2525
Bliz Square 40 Grill	2485	2495	2505	2515	2525
Bliz Square 40 Grill EMPK	2313	2322	2331	2340	2349
Bliz Square 40 Grill HF	2485	2495	2505	2515	2525

Order Guide - Bliz Square 40



Order code example

BS4-O-40-AM-3K-120-NA

BS4						
Housing Style	Wattage	Finish	Color Temperature	Voltage	Controls	Accessories
O Open	20 20 watt	AM Aluminum Metallic	27K 2700k	120 120 volts	NA Non Dimming	HF High Frequency Occupancy Sensor
	30 30 watt	IG Iron Gray	3K 3000k	277 277 volts	0-10V 0-10V Dimming	EMPK Emergency Battery Back up
GR Grill	40 40 watt (MAX)	IR Iron Rust	35K 3500k		ELV ELV Dimming	
	XX Specify Wattage must be below max	BK Textured Black	4K 4000k	1% 1% Dimming		
		WH Textured White	6K 6000k			
		CC Custom Color	RGBW RGBW			
			BLU Blue		SP Surge Protection	
					PC Polycarb Diffuser	