Q-LIGHT

PERFORMANCE iN LIGHTING | powered by GEWISS

Pathway bollard series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) aluminum extruded post.
- Copper-free (<1%) precision die-cast aluminum housing and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Marine Grade Finish.
- 5-year warranty.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.

IP 65 | WET | c UL us LISTED | 0-10 V | RAL

FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **BK-81** / Black / Textured
- **WH-87** / White / Textured
- **RB-10** / Iron rust / Textured

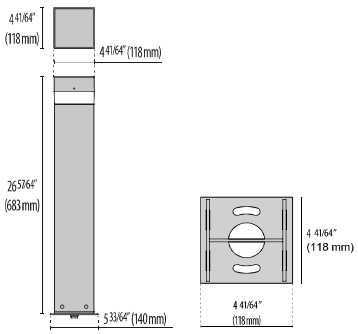

Q-LIGHT

BASE DETAIL

LUMEN OUTPUT						
	27K	30K	35K	40K	50K	65K
14W	965	1032	1099	1166	1233	1300
21W	1389	1480	1571	1662	1753	1844

Scan here for installation instructions

PERFORMANCE iN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE iN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 13
08/25

Order Guide – Q-Light

Order code example: QL-26-21W -4K -AM-UNV-NA

QL-							
SERIES	Bollard Height	Wattage	CCT	Finish	Voltage	Controls	Accessories
QL Q-Light Bollard	26 26 inch* 38 38 inch 42 42 inch 48 48 inch Max Height XX Specify Height 20" min	5W 5 watt (Min) 14W 14 watt* 21W 21 watt* (Max) XX Specify wattage must be within range	27K 2700 Kelvin 3K 3000 Kelvin* 35K 3500 Kelvin 4K 4000 Kelvin* 5K 5000 Kelvin 65K 6500 Kelvin AMB Static Amber RED Static Red BLU Static Blue GRN Static Green RGBW See Below for Details	AM Aluminum Metallic* IG Iron Gray* IR Iron Rust BK Black WH White CC Custom Color	UNV 120-277V* 120V 120V only	0-10V 0-10V Dimming Driver* ELV 120V Line-Voltage Dimming Driver	GFCI-1 1X 20-Amp Outlet GFCI-2 2X 20-Amp Outlet USB-1 1X 4-Port USB Outlet USB-2 2X 4-Port USB Outlet HSS House Side Shield PHC Photocell BABAA Build America Buy America Act compliant (not available for all options) *See Below for more details*

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ

TEMPLATE AND ANCHOR BOLTS INCLUDED WITH FIXTURE

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

PERFORMANCE iN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE iN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 13
08/25

REQUIRED FOR INSTALLATION Included with Fixture

DESCRIPTION	FINISH	PART NUMBER
Q-LIGHT		
Concrete mounting adaptor with stainless steel plate and galvanised steel rods		310398



310398

OPTIONAL CONFIGURATION AND ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Q-LIGHT		
SINGLE GANG SURFACE JBOX WITH 20 AMP GFCI OUTLET - (TWO OUTLETS TOTAL)		GFCI-1
DOUBLE GANG SURFACE JBOX WITH TWO 20 AMP GFCI OUTLETS (FOUR OUTLETS TOTAL)		GFCI-2
SINGLE GANG SURFACE JBOX WITH USB CHARGING PORTS (FOUR USB PORTS TOTAL)		USB-1
DOUBLE GANG SURFACE JBOX WITH USB CHARGING (EIGHT USB PORTS TOTAL)		USB-2
HOUSE SIDE SHIELD		HSS
PHOTOCELL		PHC

FIXTURE CAN BE SPECIFIED WITH A COMBINATION OF OPTIONS INCLUDING 2X GFCI-2, OR 2X USB-2

WHEN SPECIFYING USB, PLEASE PROVIDE THE USB TYPE NEEDED, USB-A OR USB-C

Fixture shown with single gang surface mounted jbox, suitable for GFCI-1 & USB-1



Fixture shown with two double gang surface mounted jboxes, suitable for GFCI-2 & USB-2



Light output showing House Side Shield

PERFORMANCE iN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE iN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

RGBW ACCESSORIES

Power Supply

17433
Kit driver 48V

17096
Kit driver 48V WP

RF Controls

3104173
RGBW RF controller 4 channel
(0.35A each CH)

31041730
RGBW RF controller WP 4 channel
(0.35A each CH)

310429
RGBW hand held remote

DMX Controls

178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)

1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)